



IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY



VOLUME : 2 ISSUE : 4 Print / Issue Publication Date: 31-Mar-2017



ISSN : 2455-2143



Indexed In



WWW.IJEAST.COM

editor@ijeast.com



A CASE STUDY ON STEEL CHIMNEY

Mohammad Imran Shah
Assistant Professor (Civil Engineering)
GVIET Chandigarh, India

Pervaiz Ul Hassan
B. Tech (4th year)
GVIET Chandigarh, India

Redwana Shujat
B. Tech (4th year)
GVIET Chandigarh, India

Abstract - Steel chimney, also known as steel stacks is an important industrial structure that must be constructed quickly and must be taller than all the other structures in the surrounding region. A steel chimney is chosen to satisfy this purpose, as a steel chimney can be constructed relatively faster and is more durable, and requires lower maintenance after construction. A self-supporting steel chimney is tall and cylindrical industrial structure which is extremely important for the emission of poisonous and toxic gases into the earth's atmosphere; hence it should be designed to withstand forces by extreme winds and also withstand seismic forces. The construction of tall steel stacks have been on the increase in the last couple of decades, due to primarily increasing demand for air pollution control. This work investigates only the behavior of a self-supporting steel chimney of height 100m in different wind zones in India in accordance with Indian standard codes. Also the comparison effects of loads due to wind and earthquake loads have also been performed.

I. INTRODUCTION:

A chimney is a structure which provides ventilation for hot flue gases or smoke from a boiler, stove, furnace or fireplace to the outside atmosphere. Chimneys are typically vertical, or as near as possible to vertical, to ensure that the gases flow smoothly, drawing air into the combustion in what is known as the stack, or chimney, effect. The space inside a chimney is called a flue. The height of a chimney influences its ability to transfer flue gases to the external environment via stack effect. Additionally, the dispersion of pollutants at higher altitudes can reduce their impact on the immediate surroundings. In the case of chemically aggressive output, a sufficiently tall chimney can allow for partial or complete self-neutralization of airborne chemicals before they reach ground level. The dispersion of pollutants over a greater area can reduce their concentrations and facilitate compliance with regulatory limits. Stacks are very important industrial structures for emission of poisonous gases to a higher elevation such that the gases do not contaminate surrounding atmosphere. These structures are tall, slender and generally with circular cross-sections. Different Construction materials, such as

concrete, steel or masonry, are used to build chimneys. Steel chimneys are ideally suited for process work where a short heat-up period and low thermal capacity are required. Also, steel chimneys are economical for height up to 45m. There are many standards available for designing self-supporting industrial steel chimneys: Indian Standard IS 6533: 1989 (Part-1 and Part-2), Standards of International Committee on Industrial Chimneys CICIND 1999 (Rev 1), etc. Steel Chimneys are gaining more popularity as more and more tall steel chimneys are being demanded. The time of construction is greatly reduced, and also the chimney is robust and reliable in tough conditions. This allows a steel chimney to put in to use as sooner in comparison to the reinforced concrete chimney. However taller steel chimneys have their own set of problems as designing a steel chimney becomes a difficult task as tall chimneys are subjected to higher wind speeds and higher vibrations due to seismic loads. Also a steel chimney can be really expensive. The present study is a report on the design and analysis of a steel chimney in different wind zones of India and their behaviour due to the corresponding Wind Load due the wind speed in that particular region or city. The moments due the wind load, and the moments due to seismic loads is compared. Also the base shear due to the corresponding Wind Load and the Base shear due to seismic load are compared, to find out which load has greater effect on the design parameter of a steel chimney. The present study is performed on a steel chimney of height 100m with welded joints, only one flue opening and with cylindrical block type foundation.

II. METHODOLOGY

A study on the various parts of a chimney, Understand the procedure of design of a steel chimney as per IS 6533:1989., Select various points and following the various limitations as per the Indian Standard Code., Compare the various forces and moments acting upon the chimney analyzed and designed for different wind zones.



III. RESULTS & DISCUSSION

Table1.1: Total weights of chimney in three wind zones

Wind Zone	City	Wind speed	Segment of steel selected (mm)										Total weight of steel Stack (Ws)kN	Total weight of Lining (W _l)kN	Total weight of chimney (W _s +W _l) kN	Total weight of the Chimney (W _t)kN
			1	2	3	4	5	6	7	8	9	10				
IV.	Hyderabad	44	14	14	14	14	14	16	18	20	22	22	1256.81	2048.3	3299.124	3465
VI.	Bangalore	33	14	14	14	14	14	14	16	18	20	20	1340.31	2048.3	3388.622	3560

Table1.2: Wind moments, seismic moments, wind forces and base shears at base

Wind Zone	Seismic Zone	City	Wind Speed (m/s)	Wind Moment at the Base (kN-m)	Seismic Moment at Base (kN-m)	Wind Force at the Base kN	Base shear (Seismic) kN
IV.	2	Hyderabad	44	16123.36	1256.81	319.1	59.4
VI.	2	Bangalore	33	8867.3	1913.856	179.44	60.99

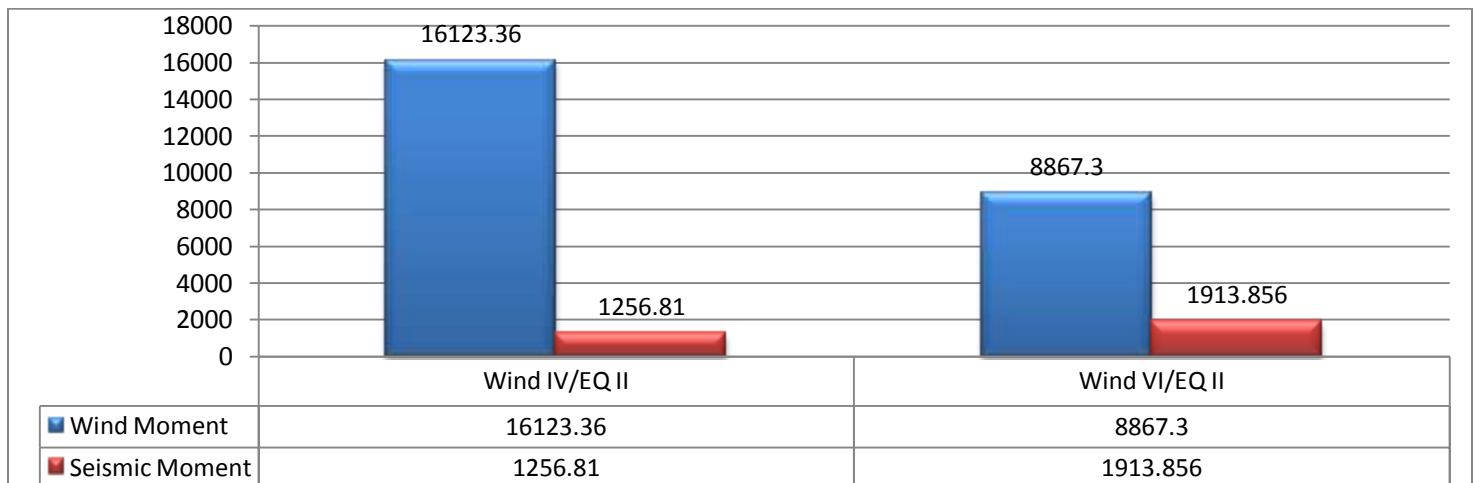


Fig 1.1 Moments at the base of the chimney

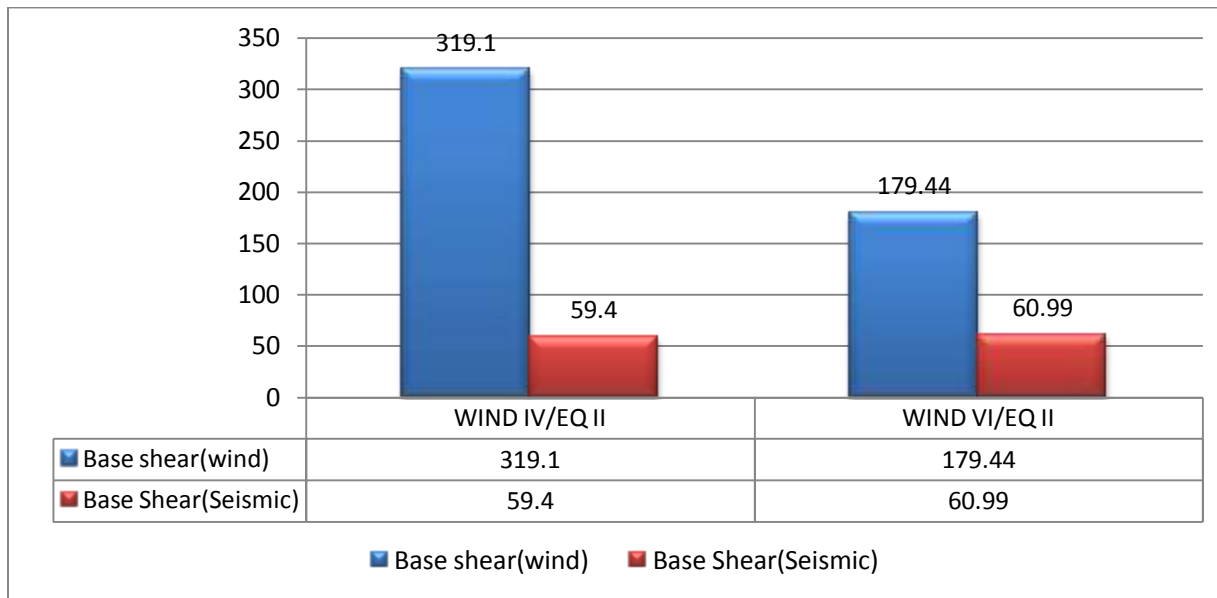


Fig. 1.2 Forces at the base of the chimney

IV. DISCUSSIONS

From the above Tables and graph we begin our discussions about the effect of different wind speeds on the weight and the thickness of the steel chimney. As the wind speed increases on the chimney, the thickness of the chimney sections also has to be increased so as to withstand the force exerted by the wind and also the consequent moment produced in each section. Due to this increase in thickness of each section, the total weight of the chimney also increases. This increase in weight not only helps in resisting moments, also helps in maintaining the stability of chimney. The next point of discussion is the effect of wind loads and seismic loads on the base of the chimney. As the chimney is designed for different wind zones which have different wind speeds. The Table 1.1 clearly shows, as we move from Wind zone IV (Hyderabad, 44 m/s) to Wind zone VI (Bangalore, 33 m/s), there is a considerable decrease in the speed of the wind, and also there is a sharp decrease in the consequent moment at the base due to the wind load. Also the shear force at the base of the chimney also decreases from Wind Zone I to Wind Zone III.

A graphical comparison is performed between the moment due to Wind Load at the base and the moment due to Seismic Load at the base. From the graph it is clearly visible that in all cases, the moment at the base due to wind load is very high in comparison to the moment due to seismic load. Also a graphical comparison has been performed between the base shear due to wind load and base shear due to seismic load. Even in this case, the base shear due to Wind Load is very large in comparison to base shear due to Seismic Load in that particular region.

V. REFERENCES

- BC Punmia, *Design of Steel Structures*.
 CICIND, "Model code for steel chimneys (Revision 1-December 1999)" Amendment A, March 2002
 G. Murali, B. Mohan, P. Sitara and P. Jayasree *International Journal of Engineering Research and Applications* "Response of Mild Steel Chimney under Wind loads" Mar-Apr 2012.
 IS 1893 Part 4; 2005, "Criteria for Earthquake Resistant Design of Structures", *Bureau of Indian Standards*, New Delhi (2002).
 IS 6533 Part 1; 1989, "Design and Construction of Steel Chimney", *Bureau of Indian Standards*, New Delhi (2002).
 IS 6533 Part 2; 1989, "Design and Construction of Steel Chimney", *Bureau of Indian Standards*, New Delhi (2005).
 Max Zar, Shih-Lung Chu, and James M. Doyle (1972), "Design of Steel Chimney Liners" *Journal of the Power Division*, Vol. 98, pp. 323-331.
 SK Duggal, *Design of Steel Structures*.
 Stephen J. Powell and Anthony H. Bryat (1983). "Ductile Anchor Bolts for Tall Chimneys" *J. Structural. Eng.* 109, 2148
 STAAD.Pro2006 (Version 11.0). Integrated Software for 3D model generation, analysis and multi-material design, *Inc. Bentley solution centers*, USA (2006).

IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

ABOUT IJEAST

International Journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high-quality research papers in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

FOCUS AREAS

- Engineering
- Applied Science
- Technology
- Innovation & Development
- Interdisciplinary Studies



PEER REVIEWED

All submissions are rigorously peer reviewed to ensure quality.



OPEN ACCESS

Free and unrestricted access to research for all.



GLOBAL REACH

Connecting researchers and professionals worldwide.



TIMELY PUBLICATION

We ensure a swift and efficient publication process.



For more information, visit our website
www.ijeast.com



INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

✉ editor@ijeast.com

🌐 www.ijeast.com

📍 India



2455-2143