

IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

VOLUME : 7 ISSUE : 05 Print / Issue Publication Date: 06-Nov-2022

ISSN : 2455-2143

DOI : 10.33564/IJEAST.2022.v07i05.019

Indexed In

Google SCHOLAR OPEN ACCESS doi Crossref

WWW.IJEAST.COM

editor@ijeast.com

International Journal of Engineering Applied Sciences and Technology, 2022
Vol. 7, Issue 5, ISSN No. 2455-2143, Pages 112-115
Published Online September 2022 in IJEAST (http://www.ijeast.com)

EXPERIMENTAL STUDY OF GLASS MACHINING PROCESS PARAMETERS IN ELECTROCHEMICAL SPARK MACHINING PROCESS

Arpit Srivastava
Department of Mechanical Engineering
Manyawar Kanshiram Government Polytechnic Kannauj, U.P., India

Sanjeev Kumar Singh Yadav
Department of Mechanical Engineering
HBTU, Kanpur, U.P., India

Abstract— **Advanced machining processes show a very crucial role in the machining of high-strength brittle materials. However, process efficiency and cost are still issues in currently used advanced machining processes. Quartz glass has broad application in the area of microfluidics systems, but the high brittleness of this material poses difficulty in its machining. In the present work, the machining of quartz glass is performed through Electrochemical spark machining processes (ECSM) which is one of the hybrid advanced machining processes. Input machining parameters are voltage, duty cycle under the constant condition of electrolyte concentration and tool electrode rotation. Input machining parameter effects are observed on the surface roughness of the machined quartz glass workpiece. Taguchi method is used to identify best optimal parameters using full factorial.**

Keywords— **Quartz, ECSM, Taguchi, Surface roughness.**

I. INTRODUCTION

The electrochemical spark machining process (ECSM) is a hybrid machining process of Electric discharge machining and Electrochemical machining. Quartz glass can be machined in an economical manner through ECSM in comparison to other advanced machining processes [1]. Although there are serval issues in the machining of quartz glass due to its high brittleness as well as limitation in ECSM like limited aspect ratio and machining depth with a low value of machining accuracy [2]. To overcome these limitations, more research is still required in this particular domain. In Electrochemical spark machining, the working procedure has four steps:
(i) Electrolysis process, (ii) Hydrogen gas bubbles formation at the tool electrode, (iii) Merging of gas bubbles at the critical voltage and gas film generation (iv) Sparking

There are two electrodes in the ECSM process. One electrode is a tool electrode with negative polarity, and the other is an Auxillary electrode with positive polarity. Both electrodes are immersed in the electrolyte solution. On application of DC voltage supply, there is a potential difference generated between electrodes and bubbles formation is started. At critical voltage, the gas film is formed due to the merging of bubbles. This gas film behaves like an insulating layer in between electrodes which produces a high potential difference and results in sparks formation. This spark is responsible for material removal on the workpiece. (see Fig. 1).

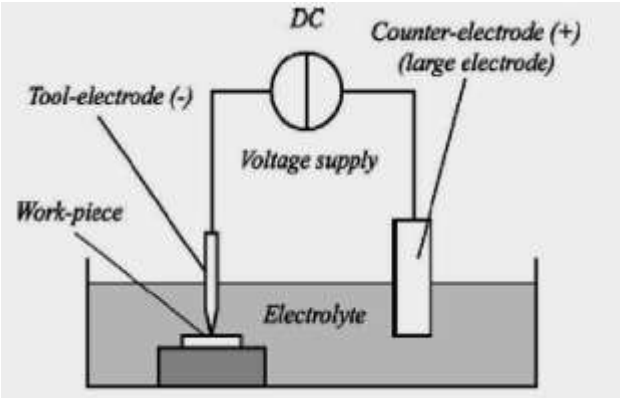


Fig.1 Schematic diagram of the basic Electrochemical spark machining process [3]

The gas film thickness affects material removal and surface roughness of the workpiece significantly in ECSM. Jiang et al. [4] concluded that bubble formation and gas film growth have a relation to surface tension and electrolyte density. Overcutting in machining can be reduced by the thin thickness of the gas film in ECSM. Gas thickness is significantly reduced by adding a surfactant to the electrolyte. The commonly used electrolytes in Electrochemical spark

International Journal of Engineering Applied Sciences and Technology, 2022
Vol. 7, Issue 5, ISSN No. 2455-2143, Pages 112-115
Published Online September 2022 in IJEAST (http://www.ijeast.com)

machining are NaOH, NaCl, NaNO3, HCl, H2SO4, etc. [3]. Stability in discharge can be improved with the use of fine graphite powder. The conductivity of fine graphite powder decreases the dielectric strength of gas film results stability in spark [5]. It is reported that the material removal rate is enhanced with an increment in pH value of the electrolyte. Base electrolyte provides a better surface finish in comparison to acidic electrolyte [6,7].

The DC voltage significantly influences the material removal and surface finish of the workpiece. At high voltage, the material removal rate is high due to the transfer of high discharge energy from the tool electrode to the workpiece. Pulse voltage supply minimizes the overcut phenomena due to the provision of discharge off time [8,9]. Taper shape is a major issue in machining through ECSM. It can be avoided with the application of a pulse voltage supply [10]. Kim et al. [11] perform experiments with disc-type electrodes and get a less tapered final machined surface in milling ECSM. Layer-by-layer machining is a powerful method in micromachining through ECSM for higher-depth channels without any geometrical interference [12].

The presented Literature review of this paper shows the efforts of researchers for improvement in material removal and surface finish of Electrochemical spark machining processes. In the presented work, microchannels are fabricated through the milling ECSM process.

II. MACHINING AND METHODS

The experimental work is completed in the developed setup of ECSM. This setup has two main components: (a) power supply, (b) machining chamber with tool electrode and auxiliary electrode. 370 µm diameter of the copper tool is used as tool electrode. A Quartz glass plate is used as a workpiece.

Table.1 Physical properties of Quartz glass

Parameters	**Typical values**
Density	**2200 kg/m^3**
Young's Modulus	**108 GPa**
Thermal Conductivity	**1.38 W/mk**

Table.2 Input Machining Parameters with their levels

Input Machining Parameters	**Level**		
	I	**II**	**III**
Voltage	**45**	**50**	**55**
Duty Cycle	**0.75**	**0.82**	**0.89**

Table.3 Constant Machining Parameters

Parameters	**Values**
Electrolyte	**NaOH with 19% concentration**
Tool electrode rotation	**400 rpm**

Table.1 shows the physical properties of the quartz glass workpiece. Tables. 2 and 3 show variable and constant machining parameters. Tool travel speed is 2.5 mm/min in all experiments.

In the present research work, surface roughness of workpiece is analyzed as an output machining parameter to find the most influencing input machining parameter through the Taguchi method. A commercial software Minitab is used for this analysis. The selected input machining parameters are voltage and duty cycle, and the output parameter is the surface roughness of the workpiece. The full factorial method (a total of nine experiments) is used for this analysis.

III RESULT AND DISCUSSIONS

Taguchi method is applied to investigate the influence of each input machining parameter (voltage and duty cycle) on the surface roughness of the workpiece.

Calculate S/N ratio for each response with the formulas given below

For surface roughness, smaller-the-better characteristics response

$$\eta_{ij} = -10log\left[\frac{1}{n}\sum_{i=1}^{n}\bar{y}_i^2\right] \quad (1)$$

where η_{ij} = S/N ratio for ith experiment and jth response.

n = Number of repetitions of each experiment.

$\bar{y}_i$ = Mean value of y_i data.

Table.5 Variable machining parameters with surface roughness

S.No.	**Voltage**	**Duty Cycle**	**Surface Roughness (µm)**
1	**45**	**0.75**	**1.9**
2	**45**	**0.82**	**1.8**
3	**45**	**0.89**	**2.1**
4	**50**	**0.75**	**1.595**
5	**50**	**0.82**	**1.461**
6	**50**	**0.89**	**1.910**
7	**55**	**0.75**	**1.5**
8	**55**	**0.82**	**1.385**
9	**55**	**0.89**	**1.814**

Table.6 Response table for S/N ratio

Level	**Voltage**	**Duty Cycle**
1	**-5.708**	**-4.384**
2	**-4.323**	**-3.742**
3	**-3.841**	**-5.746**
Delta	**1.867**	**2.003**
Rank	**2**	**1**

International Journal of Engineering Applied Sciences and Technology, 2022
Vol. 7, Issue 5, ISSN No. 2455-2143, Pages 112-115
Published Online September 2022 in IJEAST (http://www.ijeast.com)

Table.7 Response table for Means

Level	Voltage	Duty Cycle
1	**1.933**	**1.665**
2	**1.655**	**1.549**
3	**1.566**	**1.941**
Delta	**0.367**	**0.393**
Rank	**2**	**1**

Table.5 shows the response table for the S/N ratio and Table.6 shows the response table for means. Tables 4 and 5 suggest that the duty cycle is a more dominating factor in comparison to voltage for surface roughness of the workpiece at a constant 19% electrolyte concentration of NaOH and 400 rpm tool rotation. Fig. 2 shows the mean effect plot for surface roughness and Fig.3 shows the S/N ratio plot for surface roughness.

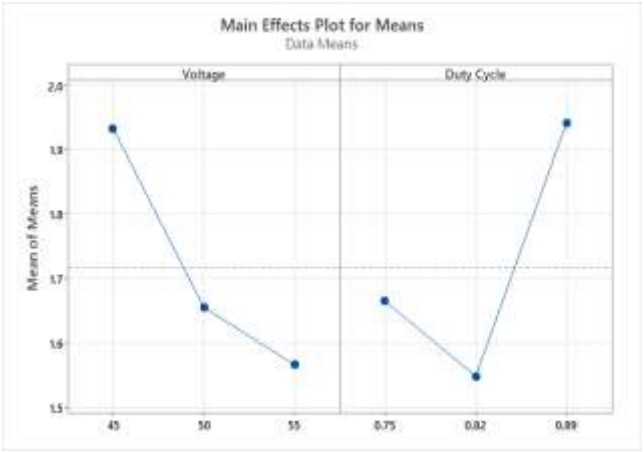


Fig.2 Mean effect plot for surface roughness

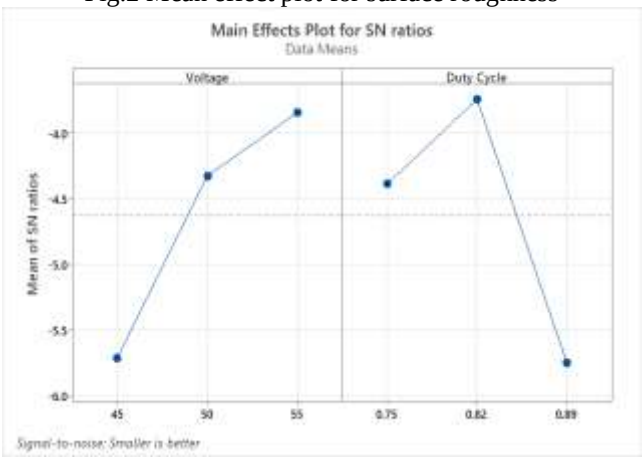


Fig.3 S/N ratio plot for surface roughness

Fig.2 shows that surface roughness is decreased with an increment in applied voltage whereas in the case of duty cycle, on an increment of a duty cycle from 0.75 to 0.82, surface roughness decreases and from 0.82 to 0.89 region, surface roughness decreases. Fig.2 and Fig.3 suggest the most optimal parameters for surface roughness are 55V and 0.82 duty cycle at constant tool rotation at 400 rpm and 19% electrolyte concentration.

IV.CONCLUSION

In the present research work, experimental analysis is performed on quartz glass machining through the ECSM process.

A total of nine experiments are performed to get surface roughness with variable voltage and duty cycle machining parameters at a constant 19% electrolyte concentration of NaOH and 400 rpm of tool electrode. With the help of the Taguchi method, optimal parameters are achieved which are 55 V and 0.82 duty cycle at constant tool rotation at 400 rpm and 19% electrolyte concentration.

V. REFERENCE

[1] Srivastava, A., & Yadav, S. K. S. (2020). Machining issues on electrochemical spark machining—a review. Materials Today: Proceedings, 26,(pp. 2853-2861).

[2] Crichton, I. M., & McGeough, J. A. (1985). Studies of the discharge mechanisms in electrochemical arc machining. Journal of applied electrochemistry, 15(1),(pp. 113-119).

[3] Wüthrich, R., & Fascio, V. (2005). Machining of non-conducting materials using electrochemical discharge phenomenon—an overview. International Journal of Machine Tools and Manufacture, 45(9), (pp.1095-1108).

[4] Jiang, B., Lan, S., Wilt, K., & Ni, J. (2015). Modelling and experimental investigation of gas film in micro-electrochemical discharge machining process. International Journal of Machine Tools and Manufacture, 90, (pp.8-15).

[5] Han, M. S., Min, B. K., & Lee, S. J. (2007). Improvement of surface integrity of electro-chemical discharge machining process using powder-mixed electrolyte. Journal of Materials Processing Technology, 191(1-3), (pp.224-227).

[6] Kolhekar, K., Sundaram, M., (2016) A study on the effect of electrolyte concentration on surface integrity in micro electrochemical discharge machining, in: Proceeding of International Conference on Surface Integrity (3rd CIRP CSI) 45, (pp.355–358).

[7] Kulkarni, A. V. (2012). Electrochemical spark micromachining process. INTECH Open Access Publisher.

[8] Paul, L., & Hiremath, S. S. (2016). Improvement in machining rate with mixed electrolyte in ECDM process. Procedia Technology, 25, (pp.1250-1256).

[9] Zheng, Z. P., Cheng, W. H., Huang, F. Y., & Yan, B. H. (2007). 3D microstructuring of Pyrex glass using the electrochemical discharge machining process. Journal



of micromechanics and microengineering, 17(5),(pp. 960-966).

[10] Ahn, S. H., Ryu, S. H., Choi, D. K., & Chu, C. N. (2004). Electro-chemical micro drilling using ultrashort pulses. Precision Engineering, 28(2), (pp.129-134).

[11] Kim, B. H., Ryu, S. H., Choi, D. K., & Chu, C. N. (2004). Micro electrochemical milling. Journal of Micromechanics and Microengineering, 15(1), (pp.124-129).

[12] Lu, C. J., Gu, A., Meng, L., & Yang, S. Y. (2012). The micro-milling machining of Pyrex glass using the electrochemical discharge machining process. In Advanced Materials Research, Trans Tech Publications Ltd , Vol. 403, (pp. 738-742).

IJEAST

INTERNATIONAL JOURNAL OF ENGINEERING APPLIED SCIENCE AND TECHNOLOGY

AUTHORS

Arpit Srivastava

Sanjeev Kumar Singh Yadav

ABOUT IJEAST

International journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high - quality research paper in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

JOURNAL METRICS

H-INDEX	i10-INDEX	IJEAST CITATIONS	PEER-REVIEWED & OPEN ACCESS
33	154	9,647 (IJEAST CITATIONS)	PUBLISHED MONTHLY

PEER REVIEWED

All submission are rigorously peer reviewed to ensure quality.

AUTHORS ARE OUR PRIORITY

We value our authors and recognize their contribution to the advancement of research and knowledge.

OPEN ACCESS

Free and unrestricted access to research for all.

GLOBAL REACH

Connecting researchers and professionals worldwide.

TIMELY PUBLICATION

We ensure a swift and efficient publication process.

For more information, visit our website
www.ijeast.com

editor@ijeast.com

www.ijeast.com

India

2455-2143