



IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY



VOLUME : 4 ISSUE : 03 Print / Issue Publication Date: 02-Sep-2019



ISSN : 2455-2143



DOI : 10.33564/IJEAST.2019.v04i03.038

Indexed In



WWW.IJEAST.COM

editor@ijeast.com



SEISMIC ANALYSIS OF MULTI-STORIED RCC BUILDING WITH CRESCENT SHAPED BRACING IN GROUND SOFT STOREY

Pallavi Partani

P.G. Student Department of Civil Engineering
 Saraswati College of Engineering, Kharghar,
 Maharashtra, India

Roshni John

Associate Professor, Department of Civil Engineering
 Saraswati College of Engineering, Kharghar,
 Maharashtra, India

Abstract— A common cause for collapse of multi-storeyed RCC building due to earthquake is occurrence of soft storey in ground floor due to presence of infill wall in upper story leading to stiffness irregularity between floors and increased shear force in ground floor columns. In current design practices stiffness and energy absorption system are combined in single system. Various soft storey strengthening techniques like use of steel bracings, dampers, column jacketing etc. have been studied in past. This paper focuses on studying the effect of special type of bracing as Crescent shaped steel bracing in ground soft storey of a G+12 storied RCC building located in Zone III, India. Response spectrum analysis is carried out for the structure using ETABS2015 software and results are computed based on storey displacement, drift, stiffness, time period and base shear.

Keywords— Soft storey, Crescent shaped steel bracing, Response spectrum analysis

I. INTRODUCTION

Earthquakes are the most disastrous and unexpected natural calamities in the world". It has occurred in India,, China, Nepal, Japan, Indonesia and many other parts of the world killing hundreds of thousands of people. Earthquakes do not kill the people but unsafe buildings do. The various factors which contribute to the unsafe buildings are vertical and plan irregularities, strength and stiffness irregularity, mass irregularity, torsion irregularity etc.

Due to urbanization and increase in population most of the reinforced building has a special feature i.e. ground is left open for the purpose of social and functional needs like vehicle parking, shops, reception lobbies, a large space for meeting room .Such buildings are often called open ground storey buildings or soft story buildings. These buildings have no infill wall in ground storey but upper storeys are with infill wall. In these arrangements upper floors are more rigid than their base. In such building dynamic ductility demand during

probable earthquake gets more concentrated in soft storey and upper storey mean to remain elastic.

According to IS 1893 (Part 1): 2016 clause 4.20 soft storey is one in which the lateral stiffness is less than Strengthening of soft storey building is needed to improve its seismic performance. This can achieved either by local strengthening method or by global strengthening techniques.

In this report we are focusing on strengthening soft storey by use of bracing system to avoid ground soft storey collapse. A new innovative device known as Crescent shaped bracing will be used to strengthen the ground soft storey.

Braced frame structure

Incorporation of bracing is another common effective approach which can be designed to provide stiffness, strength, ductility and energy dissipation. This technique can effectively reduce the risk of soft storey frame by providing adequate stiffness to the frame. Crescent-Shaped brace (CSB) is a special lateral resisting device that is capable of providing additional design freedom to frame structures. its peculiar shape, allows design its lateral stiffness independently from its initial yield strength thus appearing suitable to be used for an enhanced lateral resisting system.

In general, for steel bracing $K = \frac{AE}{L} \cos^2\theta$ For crescent shaped steel bracing =

$$K = \frac{3JE}{d^2L} \cos^2\theta, \text{ (for Single CSB), which implies}$$

where, K – Stiffness of the element

A – Cross-section area of the element

L – Length of the element

θ – Angle w.r.t. horizontal

J –moment of inertia of the element

d – Peak height of the element

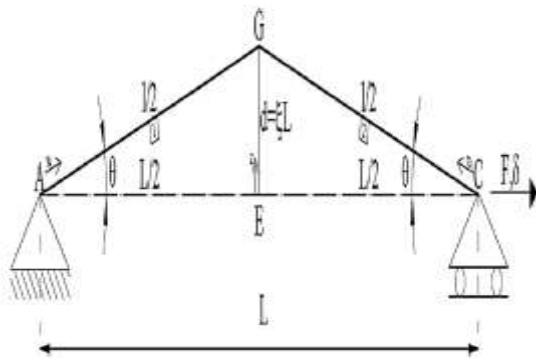


Fig 1- geometric representation of single CSB

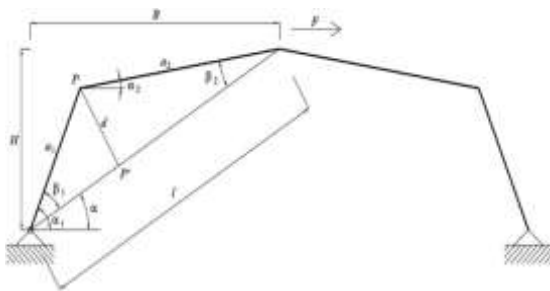


Fig 2 - geometric representation of Coupled CSB

II. VARIOUS MODELS USED FOR ANALYSIS

Total three models are studied in this paper

Model 1-Bare frame

Model 2-Bare frame equipped with first type of CSB

Model 3- Bare frame equipped with first type of CSB

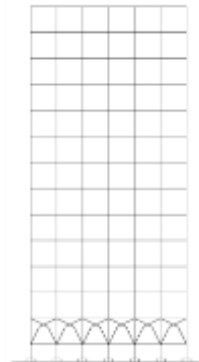


Fig 5 – model 3




Fig 6 –3-D view

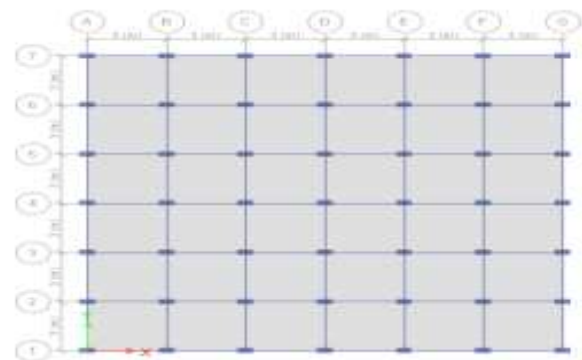


Fig 7 –Plan view of building

Description of analytical model

The building considered for design is a G+12 storied RCC framed structure building located in Zone III, India. IS 456:200 and IS 1893:2016 are used for design.

Height of building – 39m

Plan dimension – 18m X18m

Grade of concrete and steel

a) Beam and slab- M20

b) Column – M25

c) rebar-Fe 415

d) Steel- Fe 345

Size of various element of structure

1) beam-300 x 500

2) column- 300x600




Fig 3 – model 1

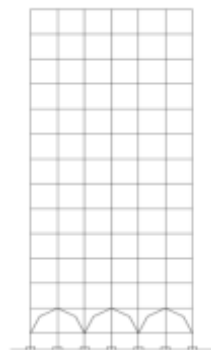


Fig 4 – model 2



- 3) Slab thickness- 150mm
- 4) Steel bracing – ISMC 250

III. RESULTS AND DISCUSSIONS

Response spectrum analysis was carried out to find the response of all models and result obtained are as follows :

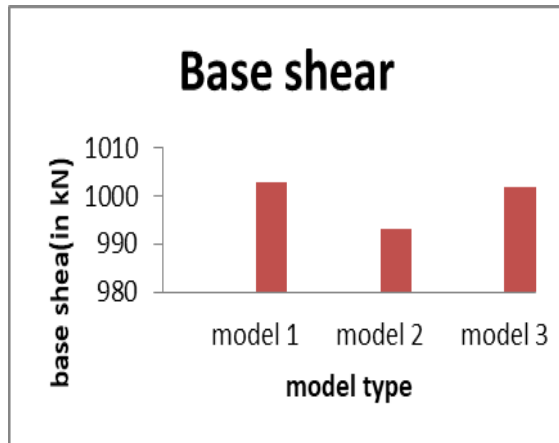


Fig 8a -Base shear comparison

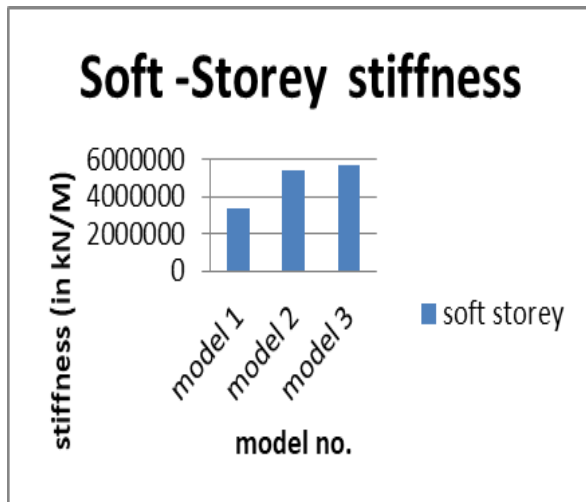


Fig 8b -storey stiffness of ground soft storey comparison

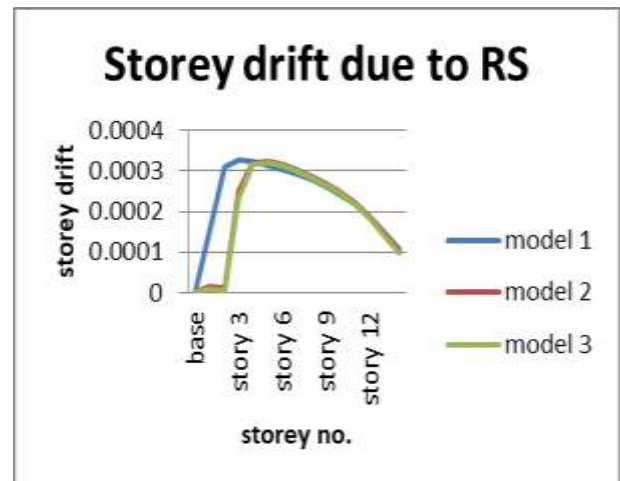


Fig 8c- Storey- drift comparison



Fig 8d -Storey-drift comparison

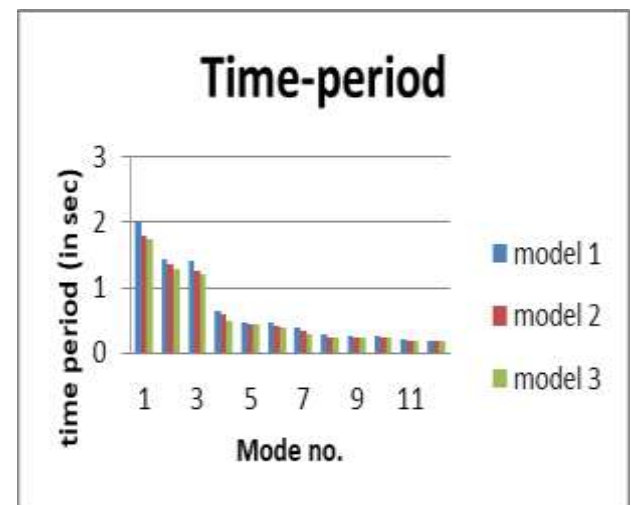


Fig 8e- Time-period comparison



IV. CONCLUSION

This paper presents an innovative approach for the seismic design of structures by use of crescent shaped bracing and its various configurations in ground soft storey from we conclude that there is about :

- 1) 12 to 14% reduction observed in storey displacements.
- 2) Storey drift have also reduced by 20%. Base shear have also decreased by small amount.
- 3) Addition of bracing in ground soft storey have increased the stiffness by almost 60-68%.
- 4) Fundamental time period decreases when provision of different types of Crescent shaped bracing are considered in soft storey to about 11-12% as compared to bare model.
- 5) Also it is found that model type 2 CSB System proves to be effective from economical point of view.
- 6) Base shear have also increased by small amount due to addition of bracing.

V. ACKNOWLEDGEMENT

It's a great pleasure and moment of immense satisfaction for me to express my profound gratitude to my guide **Prof. Prof. Roshni John, Head of Department** whose constant encouragement enabled me to work enthusiastically. Her perpetual motivation, patience and excellent expertise in discussion during progress of the project work have benefited me to an extent, which is beyond expression.

Mr. Pratish Shrikhande (Structural Engineer) ,Louis Berger G for guidance, but these are the only means at my disposal, I put on the record sentiments of deepest gratitude for them invaluable suggestion and guidance from time to time

VI. REFERENCE

- [1] Trombetti, T., Silvestri, S., Gasparini, G. and Ricci, I. (2009), Stiffness-Strength-Ductility Design Approaches for Crescent-Shaped Braces, *The Open Construction and Building Technology Journal* 3, 127-140.
- [2] Devi S. A. and Nandini G., "Seismic Demand Study Of Soft Storey Building and its strengthening for seismic resistance ," *Int. J. Emerg. Trends Technol.Comput Sci*, Vol 5,No.2,2016.
- [3] Palermo M., Silvestri S., Gasparini G.,. "Crescent shaped braces for the seismic design of building structures," *Materials and Structures*, vol. 48, pp. 1485-1502, 2014.

F. Gonzalez and J. Hernandez, " A tutorial on Digital Watermarking ", In IEEE annual Carnahan conference on security technology, Spain, 1999.

- [4] Chan RWK R. and Zhao ,Daoud "Mitigation of Seismic Risks to Soft -Storey Structures Using Toggle-Brace Damper Systems", *Applied Mechanics and Material*, August 2013.238, 833-837, 2012
- [5] Roziana I,Khalid I,Izzul Syazawan I. " Retrofitting of soft-storey building by using different type of bracing system", IOP conference series: Material Science and Engineering , Vol.431, 2018, pp.173 – 177.
- [6] IS 1893 (Part I): 2016, 6th Edition, , *Criteria for Earthquake Resistant Design of Structures*; Bureau of Indian Standards, New Delhi, India
- [7] IS 13920: 2016, *Ductile Detailing of Detailing of Reinforced Concrete Structures Subjected to Seismic Forces* Bureau of Indian Standards, , New Delhi, India
- [8] Dia Eddin N.,Ali Khalid K., Abbas Jaraj Mohammad," Comparative response assessment of steel frames with different bracing system under seismic effect
- [9] Mohamed R.,Raneesh K.,"Effect of soft-storey on tall buildings at different levels.
- [10] Carlo Ruiz C,Ingenerio Civil,"Seiemic Design of soft-storey buildings.

IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

ABOUT IJEAST

International Journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high-quality research papers in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

FOCUS AREAS

- Engineering
- Applied Science
- Technology
- Innovation & Development
- Interdisciplinary Studies



PEER REVIEWED

All submissions are rigorously peer reviewed to ensure quality.



OPEN ACCESS

Free and unrestricted access to research for all.



GLOBAL REACH

Connecting researchers and professionals worldwide.



TIMELY PUBLICATION

We ensure a swift and efficient publication process.



For more information, visit our website

www.ijeast.com



INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

✉ editor@ijeast.com

🌐 www.ijeast.com

📍 India



2455-2143