



IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY



VOLUME : 6 ISSUE : 12 Print / Issue Publication Date: 12-Jun-2022



ISSN : 2455-2143



Indexed In



WWW.IJEAST.COM

editor@ijeast.com



TO STUDY THE SOAK PIT AND BRING A NEW VIEW FOR FUTURE MODIFICATION

Atharva jadhav, Chetan kshirsagar, Pranav chavan, Sagar jagdev

Student

Department of Civil Engineering

Jayawantrao Sawant Polytechnic, Hadapsar, Pune, India

A.A Mali, Shendge J.S

Lecture

Department of Civil Engineering

Jayawantrao Sawant Polytechnic, Hadapsar, Pune, India

Abstract: In 1992 World Health Organization studies claimed to have reported that out of India's 3,119 towns and cities, just 209 have partial sewage treatment facilities, and only 8 have full wastewater treatment facilities. According to another 2005 report, sewage discharged from cities and towns is the predominant cause of water pollution in India. Investment is needed to bridge the gap between 29000 million liters per day of sewage India generates, and a treatment capacity of mere 6000 million liters per day. A large number of Indian rivers are severely polluted due to disposal of domestic waste. The wastewater is directly discharged without treatment into the water bodies are causing environmental problems also affecting the health of human beings and it will create the environmental imbalance in aquatic life. Therefore the waste water needs to be treated. In rural areas in India there is less availability of drainage system so the waste water from house needs to be treated by decentralized method and make it available for domestic purpose like watering to the plants, washing clothes, agriculture etc. The object of this project is to treat the water at domestic level.

Keywords: concret, mud pump, motar pump, PVC pipes, bixialgeogrid.

I. INTRODUCTION

Waste water is a general term used to represent the water with poor quality that contains more amounts of pollutants and microbes. If wastewater is discharged into the nearby water bodies, it can cause serious environmental and health problems to human beings. Wastewater treatment is an important measure to reduce the pollutant and other contaminants present in wastewater. The first step in wastewater treatment method is primary treatment which removes the solids, oil, and grease from wastewater. Secondary treatment or biological treatment is the second

step, which exploits microorganisms to eliminate the chemicals present in wastewater. Final step is the tertiary treatment; which eliminates the microbes from wastewater before discharging into the river. here is no intention or no need to reuse of waste water, collected storm water or gray water, soak pits can offer cost efficient opportunity for a partial treatment of waste gray or storm water from a primary treatment and relatively safe way of discharging it to the environment and there with recharging ground water bodies. As waste water percolates through the soil from the soak pit, small particles are filtered out by the matrix and organics are designed by micro organisms. The waste water effluents is absorbed by soil particles and moves both horizontally and vertically through the soil pores. sub-soil layers should be water permeable in order to avoid fast saturation. High daily volumes of discharged effluents should be avoided. Thus, soak pits are best for soil with good absorptive properties, clay, hard packed or rocky soil is not appropriate. Soak pit we used the same way as leach fields, but require less space as well as less operation and maintenance. But they generally can also receive less effluent and the ground water

AIM: to study the soak pit and bring a new view for future modification

OBJECTIVE: To Enhance the Use of Domestic Wastewater

- To Make The Village Drainage And Mosquito Free
- To Overcome Inadequacy Of Waters To Meet Water Demands
- Collect The Sludge From Tank And Use As Fertilizer



II. METHODOLOGY

- TYPES OF SOAK PIT
- MATERIALS FOR SOAK PIT
- CONSTRUCTION OF MODIFIED SOAK PIT
- WORKING OF SOAK PIT
- USE SLUDGE AS A FERTILIZER

Soak Pit Type – 1

Individual / Community Soak Pit

- Individual Soak Pit can be constructed under MGNREG Scheme.
- Soak Pit helps in recharging ground water.
- No skill or technical expertise required for Soak Pit construction.
- Low operational cost, economically efficient and easy to maintain.
- Periodic maintenance Once in a year.
- Can easily be constructed at household level

Community Soak Pit can be constructed if there is no space for Individual Soak Pit construction

Soak Pit Type – 2

Magic Pit


- Perforated Concrete rings can be used in this method.
- Fill the Boulders & Gravel around the ring.
- Connect Grey Water pipeline into the rings.

III. MODIFIED SOAK PIT

IDEA OF MODIFIED SOAK PIT

- These soak Pits Are for All Society Member
- Provide Two Soak Pit for Alternative Use
- Provide Bixal Geogrid To Avoid Entrance Of Coarser Particals In soak Pit
- Clean and change these soak pits after every 3 years
- Use Mud Pump For To Collect The Sludge water From Bottom Of The Tank

Use sludge water as fertilizer

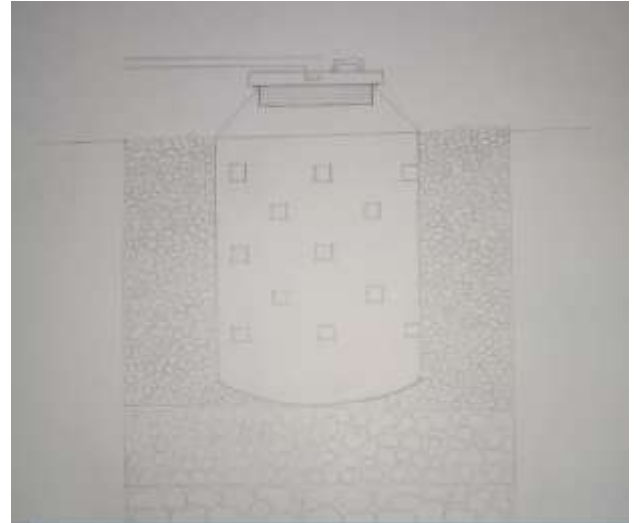

Calculation

- Suppose a village has a population of -5000
- We provide 2 soak pits for approx. 10 houses. If each house have approx. 6 people
- Water demand person
- Water Drinking – 5 Lit.
- Bath -85 Lit.
- Cleaning – 10 Lit.
- Washing- 30 Lit.
- Other – 5 Lit.
- Total = 135 Liter
- For 60 People. = $135 \times 60 = 8100$
- Suppose ~ 10,000 © tank capacity = 10,000 lit.
- Sludge Setdown -30 Liter
- Sludge Removal - 2yr
- Total sludge = $30 \text{ lit} \times 60 = 1800 \text{ lit}$
- Total tank capacity: $1800 + 10,000$
- = 11,800/
- Suppose 12,000 lit
- 12 m³
- 1 m³ = 1000 lit
- Capacity = 12 m³.
- Min depth -1.5m
- D = 3.2 m

IV. CONCLUSIONS

- Using This Method We Can Increase Amount Of Groundwater Considerably
- This Method Can Be Really Helpful In the Areas Or Villages Where The Facility Of Drainages Is Not Provided
- The Waste Material Remains In The Soak Pit Can Be Further Used For fertilizer



V. REFERENCES

- [1]. Kozlowski, T. T., P. J. Kramer, Etal. (1991). Chapter 13 – Cultural Practices. The Physiological Ecology Of Woody Plants. T. T. Kozlowski, P. J. Kramer And S. G. Pallardy. San Diego, Academic Press: 455-520
Kozlowski, T. T., P. J. Kramer, Et
- [2]. Hazeltine, B. (2003). Chapter 8 -Water Supply. Field Guide To Appropriate Technology. B.HazeltineAnd C. Bull. San Diego,academic Press: 731-809
- [3]. Barney, G. O. (1983). 2 -Environment Projections.The summary Report. G. O. Barney,pergamon: 49-271
- [4]. Mtaita, T. A. (2003). Chapter 3 -Food. Field Guide ToAppropriate technology. B. HazeltineAndC.Bull. San Diego, Academic Press:277-480
- [5]. Durkee Ii, J. B. (2014). Chapter 1- Open-top Cleaning Equipment For Vapor Degreasing. Cleaning With Solvents: Methods And Machinery. J. B. Durkee. Oxford, William Andrew Publishing: 1-65

IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

ABOUT IJEAST

International Journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high-quality research papers in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

FOCUS AREAS

- Engineering
- Applied Science
- Technology
- Innovation & Development
- Interdisciplinary Studies



PEER REVIEWED

All submissions are rigorously peer reviewed to ensure quality.



OPEN ACCESS

Free and unrestricted access to research for all.



GLOBAL REACH

Connecting researchers and professionals worldwide.



TIMELY PUBLICATION

We ensure a swift and efficient publication process.



For more information, visit our website

www.ijeast.com



INTERNATIONAL JOURNAL

OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY



editor@ijeast.com



www.ijeast.com



India



2455-2143