



IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY



VOLUME : 4 ISSUE : 12 Print / Issue Publication Date: 10-Jun-2020



ISSN : 2455-2143



DOI : 10.33564/IJEAST.2020.v04i12.105

Indexed In



WWW.IJEAST.COM

editor@ijeast.com

DESIGN OF VENTURIMETER DIAMETER FOR THE PRACTICAL APPLICATION IN AGRICULTURE SECTOR

P. H. J. Venkatesh

Department of Mechanical Engineering,
 Vignan's Institute of Information Technology (A)
 Visakhapatnam, A.P., India

Vivek Viswanadha

Department of Electrical and Electronics Engineering
 Vignan's Institute of Information Technology (A)
 Visakhapatnam, A.P., India

Abstract—The importance of Agriculture is increased and the crop productivity with high quality and quantity are produced. In order to maintain the proper quality and the growth of the crop the rich nutrients are required and these are supplied to the crop with the fertilizers. The fertilizers are available in the form of powder based and liquid based. It is not possible for the farmers to supply the fertilizer in time with the required quantity. In this paper to minimize the effort and the required quantity of fertilizer with water is made available to each plant. A case study of Mango Plantation was chosen to design a venturimeter such that uniform rate of flow of the liquid fertilizer to be supplied to each Mango Plant based on the requirement in this process the required diameter of the venturimeter throat is calculated.

Keywords—Venturimeter, Quantity Throat, Liquid Fertilizer

I. INTRODUCTION

A venturimeter consists of convergent, Divergent and throat with a circular cross section[6]. In venturimeter the fluid flows from the convergent section with high acceleration and decelerates at the divergent section, which results a static pressure drop and recovery of the pressure happens in the direction of the flow. Then the pressure difference is measured at upstream of the convergent section and other at the throat, the volumetric flow rate can be determined. The venturimeter works on the principle of Bernoulli's equation[6]. The Bernoulli's statement states that in a steady, ideal flow of an incompressible fluid, the total energy at any point of the fluid will be constant.

The total energies are sum of pressure energy, kinetic energy and datum energy. Mathematical equation can be written as,

$$\frac{p_1}{\rho g} + \frac{v_1^2}{2g} + z_1 = \frac{p_2}{\rho g} + \frac{v_2^2}{2g} + z_2$$

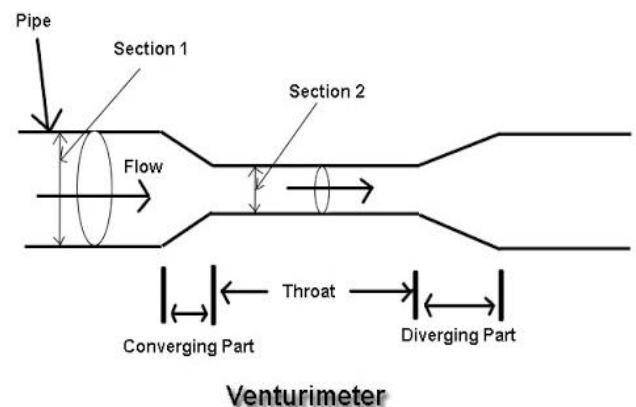


Figure.1. Venturimeter

II. FLOW METER IN AGRICULTURE SECTOR

The application of flow meters [4] in cultivation and dams are increased within increase in the demand of irrigation, drinking water and power supply using hydraulic power stations. These water flow meters are tool for the cultivators. The case study from a farm filed with mango plantation was collected from the district Agriculture officer and based on the data the required parameters are evaluated. The agriculture is updated day to day with the reforms and agriculture policies in the country, with this the farming is implemented with the natural fertilizers and led to organic farming. Organic farming is a method of crop production that involves not to use pesticides, fertilizers, genetically modified organisms, antibiotics and growth hormones, but for the organic farming also required sufficient uniform flow of water.



Figure.2. Mango Plantation



Figure.3. Pipe connected to submerged pump

III. CALCULATION OF VENTURIMETER THROAT

The mango plantation with 4 ACRES will have 2,700 Mango plants as Each Acre can have 675 Plants. For these plantation to the rich nutrients can be supplied in the form of fertilizer mixed with the water in the ratio of 1:4 quantity the ratio indicate for one part of fertilizer needed 4 parts of water. The fertilizers for mango plants are N, P₂O₅, K₂O can be used based on the requirements, More amount of K₂O is supplied for the plants as per Agriculture principle 220 kgs of K₂O is supplied in year, on an average 7g/tree is supplied.

$$\text{No of Acres of land} = 6$$

$$\text{No of mango plants for 1 Acre} = 675$$

$$\text{For 6 Acres Mango plants} = 4050 \text{ Plants}$$

$$\begin{aligned} \text{Fertilizer required} &= 4050 \times 7 \text{ gm} \\ &= 28350 \text{ gm} \\ &= 28.35 \text{ Kgs} \end{aligned}$$

$$\text{Fertilizer in liters} = 114 \text{ liters}$$

$$\text{Time for fertilizer Empty} = 203 \text{ seconds}$$

$$\begin{aligned} Q_F &= \frac{114}{360} = 0.316 \text{ lt/sec} \\ &= 0.316 \times 10^{-3} \text{ m}^3/\text{sec} \end{aligned}$$

Submersible pump of 6 H.P with discharge of 0.00227 m³/sec is choosen.

$$Q_P = 0.00227 \text{ m}^3/\text{sec}$$

Total Discharge required is obtained by adding the discharge of choosen pump and discharge of the fertilizer

$$\begin{aligned} Q_{\text{Total}} &= Q_F + Q_P \\ &= 0.00227 + 0.000316 \\ &= 0.002586 \text{ m}^3/\text{sec} \end{aligned}$$

Consider ,

$$\text{Diameter of the throat} = d_2$$

$$\text{Diameter of the pipe} = 0.04 \text{ m}$$

$$\text{Area of the throat} = \frac{\pi d_2^2}{4}$$

$$\text{Area of the pipe} = \frac{\pi d_1^2}{4} = 0.001256 \text{ m}^2$$

$$g = 9.81 \text{ m/sec}^2$$

$$Q_{\text{the}} = \frac{A_1 \times A_2 \sqrt{2g\delta h}}{\sqrt{A_2^2 - A_1^2}}$$

$$\text{Coefficient of discharge} = Q_{\text{act}} / Q_{\text{the}}$$

C_d is the coefficient of discharge for venturimeter and its value is always less then 1, the value varies from (0.93-0.98)

$$\begin{aligned} H &= \text{Height of fertilizer in drum} + \text{Atmospheric pressure head} \\ &= 0.56 \text{ m} + 10.3 \text{ m} \\ &= 10.86 \end{aligned}$$

$$Q_{\text{the}} = \frac{A_1 \times A_2 \sqrt{2g\delta h}}{\sqrt{A_2^2 - A_1^2}}$$

$$Q_{\text{the}} = 0.001256 \times A_2 \times \sqrt{2 \times 9.81 \times 10.86} / \sqrt{A_2^2 - A_1^2}$$

Taking Q_{the} = 0.002586 m³/sec on simplification

$$A_2 = 0.00017295$$

$$D_2 = 0.0148 \text{ m}$$

The throat diameter can be taken as 0.0148 m

Loss Coefficient

$$\text{For } C_d = 0.98$$

Loss coefficient (K_v), [7].

$$K_v = \frac{2g \times h_L}{V^2}$$

$$\begin{aligned} V &= Q/A \\ &= 2.05 \text{ m/sec} \end{aligned}$$

$$h_L = H(1 - C_d^2) = 0.43$$

$$K_v = 2.007$$



IV. RESULTS AND DISCUSSION

TABLE.1: CALCULATED PARAMETERS OF VENTURIMETER

S.NO	PARAMETER	VALUE
1.	Throat Diameter	0.0148m
2.	Discharge	0.002586m ³ /sec
3.	Loss coefficient	2.007

TABLE.2: DIAMETER FOR DIFFERENT NO OF PLANTS

S.NO	NO OF PLANTS	HEAD	THROAT DIAMETER
1	4050	10.86	0.0148m
2	2025	5.43	0.0074m
3	675	1.81	0.0024m

V. CONCLUSION

The design of venturimeter throat is calculated without considering minor and losses by taking the practical values from the agricultural field of 6 Acres of mango plantation and the amount of fertilizer quantity may vary from crop to crop and depends on season and also on required nutrients to be supplied. The diameter of the throat is not constant for all crops and the diameter may vary by choosing the submerged pump discharge quantity also and by determining the throat diameter the uniform discharge quantity is maintained and reduces the wastage of the fertilizer and investment on these fertilizers can be saved, with the less effort of the farmers all the plantation can be get the required sufficient amount of fertilizers and water. The loss coefficient value is calculated to determine the loss in pipe flow. From the results calculations when no of plants decreases the throat diameter and head is varied and the results explain that for less acres of land a minimum value of diameter of throat can be calculated.

VI. REFERENCES

1. J.Kumar, J. Singh, H. Kansal, G. S. Narula, P. Singh. CFD Analysis of Flow Through Venturi. International Journal of Research in Mechanical Engineering & Technology. 4(2): 2014, 214-217.
2. Kumar P, San SM. CFD Study of the Effect of Venturi Convergent and Divergent Angles on Low Pressure Wet Gas Metering. J Appl Sci. 2014; 14(22): 3036-45p
3. Arun R Prediction of discharge coefficient of Venturimeter at low Reynolds numbers by analytical and CFD Method International Journal of Engineering and Technical Research (IJETR) Volume-3, Issue-5, May 2015.
4. Tom grill & Mark Niblack,—Flow Measurement with Long-Throated Flumes under Uncertain Submergence, A journal of U.S. department of Irrigation, Vol. III, Page No.56-60, May 2009.
5. Dr.R.W.Miller, First New Proven Venturimeter, National journal of Amity Flow Co. Ltd, Vol 1, Page No 5-9, 2001.
6. Bansal R. K., —Venturimeter, A textbook of fluid Mechanics & Hydraulic Machines, Laxmi Publications Ltd, Bangalore, Page No 265 to 267, 2008.
7. Rajput R.K., —Differential Pressure Head, Textbook of Fluid Mechanics, S.Chand Publication New Delhi, Page No. 189 to 190, 2005.

IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

ABOUT IJEAST

International Journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high-quality research papers in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

FOCUS AREAS

- Engineering
- Applied Science
- Technology
- Innovation & Development
- Interdisciplinary Studies



PEER REVIEWED

All submissions are rigorously peer reviewed to ensure quality.



OPEN ACCESS

Free and unrestricted access to research for all.



GLOBAL REACH

Connecting researchers and professionals worldwide.



TIMELY PUBLICATION

We ensure a swift and efficient publication process.



For more information, visit our website

www.ijeast.com



INTERNATIONAL JOURNAL

OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY



editor@ijeast.com



www.ijeast.com



India



2455-2143