



IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY



VOLUME : 7 ISSUE : 10 Print / Issue Publication Date: 17-Apr-2023



ISSN : 2455-2143



DOI : 10.33564/IJEAST.2023.v07i10.010

Indexed In



WWW.IJEAST.COM

editor@ijeast.com

IMPACT OF INDUSTRIALIZATION ON THE PHYSICO-CHEMICAL PARAMETERS OF THE AMI RIVER

Sarwat Jahan, Prof Ajay Singh
Department of Zoology and Environmental Science,
Natural Product Laboratory, Deen Dayal Upadhyaya Gorakhpur University.
Gorakhpur- 273009, Uttar Pradesh, India.

Abstract— Rapid industrialization, along with other human activities, has had a negative impact on the environment in India. Major industries lack of insufficient effluent treatment facilities. It contributes to environmental degradation. Present study of the physicochemical analysis of Ami River. Samples were collected from GIDA sector-13, Gorakhpur. Physicochemical parameters were studied one year 2020-2021. All parameters reported less or more than standard permissible limits of CPCB and WHO. pH reported 8.5 to 8.85. Temperature 32° C in summer, color brownish black and brown in site-1 and site-2, odor, pungent smell recorded site-1 and site-2, turbidity 48 NTU in summer, EC 111.1 $\mu\text{mhos}/\text{cm}^2$ in rainy season, TSS 1300 mg/L, TDS 597.56 mg/L, free CO₂ 12 mg/L, DO 2.0 mg/L in summer, BOD 1167 mg/L in winter, COD 1063.5 mg/L, in summer, very higher than permissible limit. The value found above 0.5 has been highlighted and considered the relationship study. The correlation analysis is identified that EC, COD, BOD, CO₂, turbidity, TSS, alkalinity, observed higher-level correlation with water quality parameters in all seasons. These studies prove that the river is carrying a heavy load of organic waste that exceeds its dilution, self purification capability. High anthropogenic activities, improper sanitation and direct discharge of effluent by industrial and domestic sewage that is finally altered into the below class E- categories water.

Keywords—Industrialization, Industrial effluents, Ami River, Physico-chemical parameters, WHO.

I. INTRODUCTION

For all the life forms, water is a crucial abiotic component. The quality of life has always been significantly influenced by the quantity and quality of water available. The two have a close relationship to the use of water and the state of the economy progress. Water is necessary for ecosystems to survive. Water resources are crucial for the development of the people as well as the health of the natural world and its ecosystems [1]. Due to its important contribution to economic growth and human welfare, industrialization is seen as the

cornerstone of development initiatives, yet it comes at an inevitable cost and with issues in terms of contamination of the water and air resources. Water bodies in particular are becoming contaminated as a result of wastewater discharge [2]. Industrial effluents are main hazards to the native biodiversity in fresh water [3, 4]. Threats from industrial effluents to the hydrology of the ecosystem and the river system. Release of effluents results in modification to the structure and makeup of the community. Frequently, these effluents contain heavy metals, which may leading to a bioaccumulation problem [5]. Because of the country's increasing industrialization, there has been a tremendous increase in the contamination of natural water sources [6]. When pollutants are directly or indirectly dumped into water bodies without proper treatment to eliminate hazardous substances, environmental degradation results [7-8]. Pollution will undoubtedly have an impact on the nutritional value of it. These contaminants, which are present in fish and aquatic bodies but are not physicochemical, are extremely damaging and affect the community-level organization, by tainting the very crucial food web, which eventually has an impact on people's health [9,10,11,12]. Minamata disease cases reported in Japan 1956 [13]. The diseases have an effect on the brain; can cause insanity and leading to death, pollution of water by industrial effluents containing methyl-mercury. The Itai-Itai disease was caused by cadmium poisoning in Japan prefecture factory. Cadmium poisoning causes damages to the joints softens the bones and causes the body to shrinks and the affected people suffer a painful death [14]. Toxic and hazardous wastes settle in river water as bottom sediments in industrial effluents, health hazards in both urban and rural areas water-dependent population supply for domestic use [15]. The environmental landscape is characterized in large part by the degradation of water quality, the depletion of aquatic species, demanding immediate global attention level [16]. Industrial effluents produced a significant amount of significant impact on the contamination of water bodies, as a result of these effluents, the physical, chemical and biological alter of the receiving body of water [17]. Increased impermeable land surface in urban areas leads to harsh and drastic changes in the natural order of things [18]. The most



important step to understanding and deliberating about the sorts of water pollution increasing effective reduction strategies is monitoring [19]. Water qualities determine the physical, biological and chemical composition [20]. The chemical composition of substances like heavy metals, pesticides, detergents, and petroleum [21]. The Ami River is 147 km long and covers approximately 5000 hectares with 330 villages. Water plays an influential role in the social, environmental, and economic value of an aquatic ecosystem. It benefits agriculture, fishing, drinking water supply, recreation from heavily populated areas. The aim of the study is describing the seasonal variation of physicochemical parameter of water influenced by industrial effluents and to identify the most influence variation observed. Focus on trying to identifying contaminants in the river, calculating the water pollution index, and then enforcing regulations to reduce water pollution.

II. MATERIAL AND METHOD

Study Area

The Ami River originates from Sikhara Tal, Siddharth Nagar and before flowing on to Basti, Sant Kabir Nagar and Gorakhpur. It travels 102kms between origin and destination, of which polluted sections located between Rudhauli, Basti, Sohgauna, and Gorakhpur of approximately length of 80 kms. At present time, 37 (Left Bank: 17 and Right Bank: 20) villages located on the banks of this polluted river. According to population of these villages are 42,345 as per the survey of 2011. Taking Decades growth into report, the estimated population in 2019 would be approximately 48,725 and estimated sewage generation would be around 5.3 MLD. There are generally 12 water polluting industries in the catchment area of the concerned (alarmed) stretch of Ami River, These industries have effluent treatment plants. Some industries have zero liquid discharge as per charter, while some other industries are discharging its effluent on land as per imposed by UPPCB conditions. Taking place through 03 drains is industrial discharge in the River. One of three drains, one drain is mixed drain which is carry treated industrial effluent as well as untreated sewage.

Sampling Site

This Drain originates from the nearby area of GIDA. It carries both treated and untreated effluent of industries in GIDA and untreated domestic effluent discharged from industries in GIDA. This drain meets River Ami near vill Bhansar. The Sarya drain meeting point is located at Latitude: 26.718722 N & Longitude: 83.21747 E. The Sarya drain spans approximately 4.92Km. Sarya drain carries 12 MLD of sewage generated by GIDA industries, and approximately 3

MLD treated industrial effluent discharge by industries in GIDA.

- Location is at Adilapar Village, which is also extremely critical because industrial effluent from GIDA is discharged through a drain into the River and the pollution load is moderately high.
- 22 km from Gorakhpur, in the industrial sector of GIDA sector-13, in the village –Bhansar, close to Adhila Bazaar
- Select 4 Sampling Site:-
- Site- 1- Ramlila Samiti (Effluent After Treatment)
- Site -2 -Located near Semrahwa Baba Mandir (Just Entry Point into River) 200
- Site -3 -Meter up Stream River.
- Site -4-200 Meter Downstream River.

Sampling

Sampling was done from the morning 8Am to 9Am at the study sites in rainy and winter and summer at the regular intervals. Sample taken 2 liters plastic gallons appropriate care was used to avoid any annoyance due to the loose-fitting sediments and rock present in river water. It was kept in mind; put to avoid entrance of needless air bubbles the cap was applied in the river itself after sample bottle was packed up to the rim. The collected samples were brought immediately to the laboratory and physico chemical parameters of water samples were estimated by the help of methods provided in APHA manual guide of water and waste water management, 2005. [22].

Method of Analysis

Physiochemical Analysis

Samples collected were evaluated by the Turbidity, Electric Conductivity, and pH, Total dissolve Solids (TDS), Total Suspended Solids (TSS), and Dissolved Biochemical Oxygen Demand (BOD), and Oxygen (DO), Chemical Oxygen Demand (COD). Alkalinity, free Carbon Dioxide (CO₂). APHA, 1998[22] (Table-1), were used for analysis of water samples. Results are compared with standards given by the Central Pollution Control Board (CPCB) and World Health Organization (WHO).

Physical parameters such as temperature color and odor were noted down on the spot itself before to the collection of samples.

Statistical Analysis

MS Excel 2007 (12.0.6787.5000) SP3 MSO (12.0.6607.1000), analyzes data value are expressed mean Standard deviations (Mean±SD). Analysis of correlation matrix in rainy, winter and summer.

Table.3. APHA manual guide of water and waste water management, 1998. [22].

S.NO	PARAMETERS	INSTRUMENT USED	METHODOLOGY
1	TEMPERATURE(°c)	Thermometer	Instrumental
2	Color	Visually	Visually
3	Odour	Physiological Sense	Physiological sense
4	pH	pH Meter	Instrumental
5	Electrical Conductivity (µs/Cm)	Conductivity Meter	Instrumental
6	Turbidity(NTU)	Turbidity Meter	Instrumental
7	Total Dissolve Solids (mg/L)	Hot Air Oven , Crucible , Weighing Machine Sprit Lamp	Instrumental Evaporation at 103°C-105°C
8	Total Suspended Solids(mg/L)	Centrifuge Tube, Centrifuge , Hot Air Oven ,Desiccator	Instrumental Method
9	Dissolve oxygen (mg/L)	BOD bottle (capacity 300ml), buret, pipettes, beaker (capacity 500ml)	Winkler Method
10	Biochemical oxygen Demand (mg/L)	BOD bottles (capacity 300 ml), incubator, beaker, conical flask ,tie-pod stand	BOD Iodometric Method (3-day set on 25±2°C)
11	Chemical oxygen demand (mg/L)	Beaker , pipettes , conical flask, measuring cylinders ,	open reflux method
12	Free Carbon Dioxide(mg/L)	Burette , tie-pod stand ,beaker ,measuring	Titration method
13	Alkalinity (mg/L)	Beaker , conical-flask , tie-pod stand	Titration method

III. RESULT AND DISCUSSION

The data collected by sampling all three seasons are analyzed and the results are discussed here for various water quality parameters.

pH

pH is an important parameter for determining water quality. It determines the water acidity or alkalinity. The pH of water fluctuated range of 8.6 in rainy, 8.5 in winter and 8.85 in summer mentioned in (Table-2). The water which has pH value above neutral pH 7, then, it means that water is polluted by strong base or several other bases and also pH records provides the information about the types of contaminants discharged in the river are both acidic or basic. pH of treated effluents was 8.6 in rainy, 8.5 in winter and 8.85 in summer (Table-2), (Table.3), which was more than permissible limit of industrial effluents. The Most favorable pH ranged for sustainable aquatic life is pH 6.5 to 8.2. [24]. The pH of effluents was less than optimal, which can be harmful to aquatic flora and fauna where effluents are released. Our result is support the same as Tiwari et al. [25]. Seasonal variation show in Figure .1. (a).

Temperature

The temperature of the river water varied across all sites and for a variety of reasons. The highest temperature recorded was 32 °C at site-1 in the summer, and the lowest was recorded in

Winter at site -3, and site-4 mentioned in (Table-2) and Seasonal variation show in Figure.1. (b). Temperature is an important physical property of the water ecosystem and is affected by the quality, types of nutrients, and habitat surrounding the water body. It has an impact on the growth and survival of the flora and fauna. Microbial activity increases as the temperature of the water body. The increase in water temperature is caused by the types of industrial effluents discharged in the form of waste by products of ongoing chemical reactions by heavy machines, heavy metals, and toxic chemicals. Our results agree these values with the temperature values reported by other authors [26, 27, 28, and 29]. Water temperature should be considered when calculating metabolic rates and photosynthesis production, complex toxicity, dissolved oxygen and extra dissolved gas concentrations, conductivity and salinity, oxidation reduction potential (ORP), pH, water density [30].

Color

Including color data, observed visually reveals that the river water has noticeable colour differences from natural color appearance from sampling location. According to CPCB norms approved for categories water (Table-3), there shouldn't be a noticeable color in the river water. As a result, it is clear that the site-1 and site-2 reported blackish brown color, site-3 reported brown color and site- 4 (Table-2), is yellowish in rainy, reddish brown, dark brown, brown and



yellowish color reported in winter and same as it is winter color reported in summer. Thus, it is noticeable that the stretch of the Ami River from selected these sites is influence by the release of industrial effluents into the river. It is observable from the (Table -2), that the color of water entirely depends on the nature of effluent discharged via the industry there on the bank of the river. The color alter is the indication of serious pollution forced in the water body. Light penetration in the deepness of the water body is affected and sequentially growth of flora and fauna is changed. Because light is required for growth of plants and photosynthesis and result of this fishes thriving on phytoplanktons find problem to stay alive in such an antagonistic condition.

Odor

Based on the odor, it can be drained that Ami River facing unfavorable condition, which can be seen in the light of odor reported in all the sites. The appropriate norms for class-A-water recommend that here should be no unpleasant color present in the river. So, it also indicates the serious pollution in site-1 is having alcoholic smell and site 2 having pungent smell. Odor data collected by direct smelling presented in (Table-2) opposing to the river water is characterized via pungent smell starting sampling locations.

Turbidity

Turbidity is a determined cloudiness and lack of clarity appropriate to suspended solids which are unseen with naked eyes. High concentrations of particulate matter influence light penetration and productivity, recreational values, and habitat quality [31]. Particles also serve as a home for other pollutants, particularly metals and bacteria. For this reason, turbidity readings can be used as an indicator of potential pollution in a water body [32]. Figure- 1(c). Treated effluent was dense with 40.75 NTU in rainy season, 34 NTU in winter and 48 NTU in summer turbidity reported. Turbidity indicates the extent of pollution and particles accumulation to some extent.

Electrical Conductivity

Electrical conductivity is a measure of an aqueous solution's ability to carry an electric current. This skill is directly related to the concentration of ions in water electrical conductivity. The salinity or total salt content of water can be determined using this simple method. A dissolved salt is commonly found in wastewater effluents, from domestic sewage and industrial waste [33]. The electrical conductivity is reported in ami river was as where as 111.1 $\mu\text{mhos}/\text{Cm}^2$ in rainy, 94.25 $\mu\text{mhos}/\text{Cm}^2$ in winter and 108.4 $\mu\text{mhos}/\text{Cm}^2$ in summer mentioned (table-2). The electrical value in effluent is higher electrical value can be harmful to the aquatic environment. Seasonal variation show in Figure1. (d).

Total Suspended Solid (TSS)

TSS reported in Ami River all three season reported as 1300 mg/l in rainy, 742.5 mg /l in winter and 868.5 mg/l in summer

(Table 1). Seasonal variation show in Figure 1. (e). Reported TSS is higher than the permissible limit (Table 1). This result indicates the heavy organic and inorganic pollution in the river according to Oberrecht [34] explain why increase in turbidity and TSS can often indicate potential contamination, pollution, not just a drop in water quality. When TSS concentration is due to organic matter, the presence of bacteria, protozoa, and viruses are more likely [35].

Total Dissolved Solids (TDS)

TDS in all three seasons are reported where as 597.56 mg/l in rainy, 592.58mg/l in winter and 587.92 mg/l in summer. Seasonal variation shows in Figure 1. (f).TDS is reported higher than the permissible limit (Table-2). TDS is a measurement of inorganic salts, organic matter and other dissolved solids toxicity. In the ionic composition of water and the toxicity of individual ions, TDS are a significant contributor to the water quality. Deterioration resulting in aesthetic issues, a decline in fisheries resources depletion and serious ecological degradation of aquatic environments [36]. Reduce light penetration in water, resulting in low productivity of ecosystem.

Alkalinity

Alkalinity data shown in (Table-2) reveals that alkalinity values are high at many of the sample locations, which also reveals that the amount of organic waste supplied of these places is decomposing at a fairly high rate. This necessitates the treatment of industrial waste water that enters the river near these points. Seasonal variation shows in Figure 1. (g).

Free Carbon Dioxide (CO₂)

In the effluents and domestic wastes discharged in the river, resulting in the highest CO₂ level ever recorded (Table-1). During the rainy season, river carry runoff soil and clay and pollutant from catchment areas, as well as industrial effluents, are responsible for moderate CO₂ levels.

Dissolved oxygen (DO)

DO report 2.6 mg/l in rainy, 2.3 mg/l in winter and 2 .0 mg/l in summer and Seasonal variation shows in Figure 1. (i). DO is less than permissible limit of CPCB (Table-2). These results indicate the heavy pollution in river ami. This result is agreed with Tiwari et al. [25] and Kumar et al. [37]. The quantity of oxygen in aquatic environments is available to fish, invertebrates, and every organism in the water [38]. Mainly aquatic plants and animals necessitate oxygen to survive; fish, for example, cannot live in water with less than 5 mg/l DO [39]. The low level DO is a sign of contamination in the water and is a key feature in determining water quality, pollution control, and treatment processes [40]. DO assist in adaptable metabolic processes in plant and animal communities and acts as an indicator of pollution in aquatic ecosystems [41]. The decreased DO might be noticeable to the discharge of hot waste water from the industry [42]. DO vary depending on

temperature. The oxygen solubility decreases as temperature increases [43].

Table 1. Physical and chemical parameters of water sample collected from sites included in present study of Ami River of year 2020-2021, Rainy season (July-2020-August 2020), Winter (December 2020-February 2021) and Summer season (March 2021-June 2021).

Parameter s	Season s	Chosen sites				Mean	SD	Standard value set by CPCB (central pollution control board)	Reference value set by WHO (world health organization)
		Site-1	Site-2	Site-3	Site-4				
pH	R	8.9	8.6	8.4	8.5	8.6*	0.21	5.5-8.5	6.5-8.5
	W	8.9	8.6	8.2	8.5	8.5*	0.28		
	S	9.1	8.9	8.6	8.8	8.85*	0.20		
Temperat ure(°C)	R	30	29	28	28	28.27*	0.95	not exceed 5°C than receiving water temperature	
	W	22	22	21	21	21.5*	0.57		
	S	32	30.5	29	30	30.37*	1.25		
Colour	R W S	Blackish brown Reddish brown Reddish brown	Blackish brown Dark brown Dark brown	Brown Brown Brown	Yellowis h Yellowis h Yellowis h	-	-	Not applicable	Not applicable
Odour	R W S	Alcoholic Pungent Pungent	Pungent Pungent Pungent	Earthy Earthy Earthy	Earthy Earthy Earthy	-	-	Not applicable	Not applicable
Turbidity(NTU)	R	49	40	38	36	40.75*	5.73	10NTU	5-25 NTU
	W	38	34	30	34	34*	3.266		
	S	55	45	40	42	48*	6.78		
Electric conductivi ty(µmhos/ Cm²)	R	140.4	120	90	94	111.1	23.6	2000 µmhos/Cm²	1000 µmhos/Cm ²
	W	124.5	87.4	83.2	81.9	94.25	20.3		
	S	109	113	106	105.7	108.4	3.39		
TSS(mg/l)	R	1940	1130	1110	1020	1300*	429.3	20 mg/L	NA
	W	990	760	670	550	742.5*	186.0		
	S	1170	978	729	597	868.5*	255.6		
TDS(mg/l)	R	599.91	598.11	597.10	595.12	597.56	1.99	100 mg/l	500 mg/L
	W	592.8	591.5	593.25	592.77	*	0.75		
	S	587.81	588.1	587.74	588.06	592.58	0.17		
Alkalinity(mg/l)	R	477	396	374	330	334.25	61.61	600 mg/L	120mg/L
	W	490	405	387	385	*	49.75		
	S	545	527	515	512	416.75	14.97		
Free CO₂(mg/l)	R	15	15	10	10	12.5	2.88	NA	NA-
	W	11	6	4	4	6.25	3.30		
	S	15	11	11	10	11.75	2.21		

DO(mg/l)	R W S	2.6 2.1 1.5	2.9 2.6 1.9	2.3 2.4 2.3	2.6 2.2 2.6	2.6 2.328 2.07	0.24 0.22 0.47	4 mg/L	6 mg/L
BOD(mg/l)	R W S	1085 1180 760	910 1160 840	990 1050 740	970 1280 860	900.75* 1167.5* 800*	72.6 94.2 58.87	30 mg/L	5 mg/L
COD(mg/l)	R W S	1170 1187.53 1246.08	1113 1040.64 1104.72	1080 993.76 981.28	1054 746.88 921.92	1104.2 5* 992.20 * 1063.5 *	50.0 183.1 143.5	250 mg/L	10mg/L

NA- Not Available, *- Higher than permissible limit of standards.

Table .3. Water Quality Criteria CPCB (Designated Best Use Classification of Surface) 2019. [23]

Designated Best Use	Quality class	Primary water quality criteria
Drinking water source without conventional treatment but after chlorination	A	Total coli form organisms (MNP*/100) shall be 50 or less pH between 6.5 and 8.5 Dissolve .Oxygen 6mg/l or more Biological oxygen demand 5 days 20°C 2mg/l or less
Outdoor bathing(or ganised)	B	Total coli form organisms (MNP*/100) shall be 500 or less and pH between 6.5 and 8.5 Dissolve .Oxygen 5mg/l or more Biological oxygen demand 5 days 20°C 3mg/l or less
Drinking water sources after conventional treatment and disinfection	C	Total coli form organisms (MNP*/100) shall be 5000 or less and pH between 6 and 9 Dissolve .Oxygen 4mg/l or more Biological oxygen demand 5 days 20°C 3mg/l or less
Propagation of wild life and fisheries	D	pH between 6.5 to 8.5 and Dissolve .Oxygen 4mg/l or more Free ammonia (as N) 1.2 mg/l or less
Irrigation , industrial cooling controlled waste disposal	E	pH between 6.5 to 8.5 and electrical conductivity at 25C micro mhos/cm Max.2250 Sodium absorption Ratio Max. 26 Boron Max. 2mg/l
Below E		Not meeting A,B,C,& E criteria

Biological Oxygen Demand (BOD)

BOD concentration is reported 900.75 mg/l in rainy, 1167.5 mg/l in winter and 800mg/l in summer. These findings show that the river is highly polluted. Highest BOD reported in winter mentioned in (Table-2) and seasonal variation show in Figure.2. (j). The standard permitted level of industrial effluents of BOD is 350 mg/l. And CPCB permissible limit of

BOD is 30mg/l. Our finding is higher than the permissible limit. The value of BOD in water samples was an indicator of organic waste entering the canal. The presence of additional waste products or pollutants in the Ami River is suggested by the high BOD values. (Table-.2). This could be due to organic matter escaping into the canal, primarily from fecal deposition by surrounding population. Canal water transported a

significant amount of organic matter from domestic sewage and industrial effluents during flow. As a result, immediate action is required to manage the pollution load entering the river.

Chemical Oxygen Demand (COD)

COD of collected samples found very high show in (Table-2); rainy, summer show high COD as compare to winter and seasonal variation show in (Figure .2.(k). The recommended range of COD according to CPCB is 250mg/l and the

reference range of the standard industrial effluents is 100 mg/l, while in the analysis of ami river water, the finding value is where much higher. In all the seasons. Our findings agree with Tiwari et al. [25] and Kumar et al. [37]. The available dissolved oxygen in water determines Chemical Oxygen Demand. High COD levels reduce the amount of dissolved oxygen available to aquatic organisms [44]. A High level of COD indicates low available amount of dissolved oxygen ,which has adverse cause on aquatic flora and fauna) [45].

Table. 4. Correlation matrix analysis result (rainy season).

	pH	Temperature	Turbidity	EC	TSS	TDS	Free CO ₂	DO	BOD	COD	Alkalinity
pH	1										
Temperature	0.9927 95	1									
Turbidity	0.9379 23	0.9712 15	1								
EC	0.5259 8	0.4605 52	0.3841 92	1							
TSS	0.8098 91	0.8316 18	0.8865 12	0.6731 5	1						
TDS	0.1743 04	0.0576 83	- 0.1774	0.4468 89	- 0.1918	1					
Free CO₂	0.7582 66	0.8268 11	0.9369 71	0.2225 39	0.8688 23	-0.5056	1				
DO	- 0.7860 7	- 0.8146 83	- 0.8836 8	- 0.6374 4	- 0.9981 1	0.2516 79	- 0.88 713	1			
BOD	0.1087 86	0 0	- 0.2380 8	0.2368 31	- 0.3454 7	0.9733 68	- 0.56 171	0.4020 92	1		
COD	0.3698 82	0.4104 26	0.5468 13	0.5890 14	0.8445 38	- 0.4596 9	0.68 1932	-0.8631 -0.6438	-0.6438	1	
Alkalinity	0.8821 76	0.9148 59	0.9678 23	0.5267 32	0.9728 87	- 0.2301 8	0.94 1127	- 0.9729 8	- 0.3402 5	0.7349 34	1

Table. 5. Correlation matrix analysis result, (winter season)

	pH	Temperature	Turbidity	EC	TSS	TDS	Free CO ₂	DO	BOD	COD	Alkalinity
pH	1										
Temperature	0.8	1									
Turbidity	0.98994 95	0.70710 68	1								
EC	0.83775 37	0.66542 56	0.83045 99	1							
TSS	0.76016 97	0.82222 44	0.70206 85	0.93045 48	1						
TDS	- 0.33901 85	- 0.65962 87	- 0.24406 11	0.09385 47	- 0.11803 95	1					
Free CO ₂	- 0.53210 64	- 0.14002 8	- 0.59408 85	- 0.83183 46	- 0.61477 45	- 0.60575 23	1				
DO	- 0.44264 23	0.13018 89	- 0.55234 48	- 0.59049 78	- 0.26054 23	- 0.63907 97	0.89327 46	1			
BOD	0.63409 92	0.79262 4	0.56046 98	0.86032 84	0.98277 45	- 0.10662 52	- 0.53787 25	- 0.13494 19	1		
COD	0.52004 62	0.76822 75	0.43180 74	0.76977 55	0.94167 76	- 0.13272 62	- 0.43168 58	0.00126 16	0.9872 318	1	
Alkalinity	0.26100 89	0.73209 81	0.13504 47	- 0.01421 1	0.28492 58	- 0.93555 22	0.56605 69	0.75005 65	0.3279 835	0.39092 27	1

Table .6. Correlation matrix analysis result (summer season).

	pH	Temperature	Turbidity	EC	TSS	TDS	Free CO ₂	DO	BOD	COD	Alkalinity
pH	1										
Temperature	0.966988	1									
Turbidity	0.941316	0.955753	1								
EC	0.961158	0.994463	0.920243	1							
TSS	0.927242	0.900107	0.982439	0.855387	1						
TDS	0.803477	0.914281	0.925028	0.883228	0.847032	1					
Free CO ₂	-0.53452	-0.30151	-0.35221	-0.29806	-0.48411	0.025991	1				
DO	0.377964	0.426401	0.142314	0.518272	0.019017	0.20625	-5.2E-16	1			
BOD	0.888618	0.749391	0.804171	0.727635	0.876518	0.52108	-0.83946	0.093111	1		
COD	0.9127	0.975747	0.976691	0.951402	0.919545	0.976536	-0.17883	0.269215	0.681842	1	
Alkalinity	0.685108	0.758767	0.534011	0.820361	0.407352	0.596531	-0.04689	0.906313	0.348615	0.649837	1

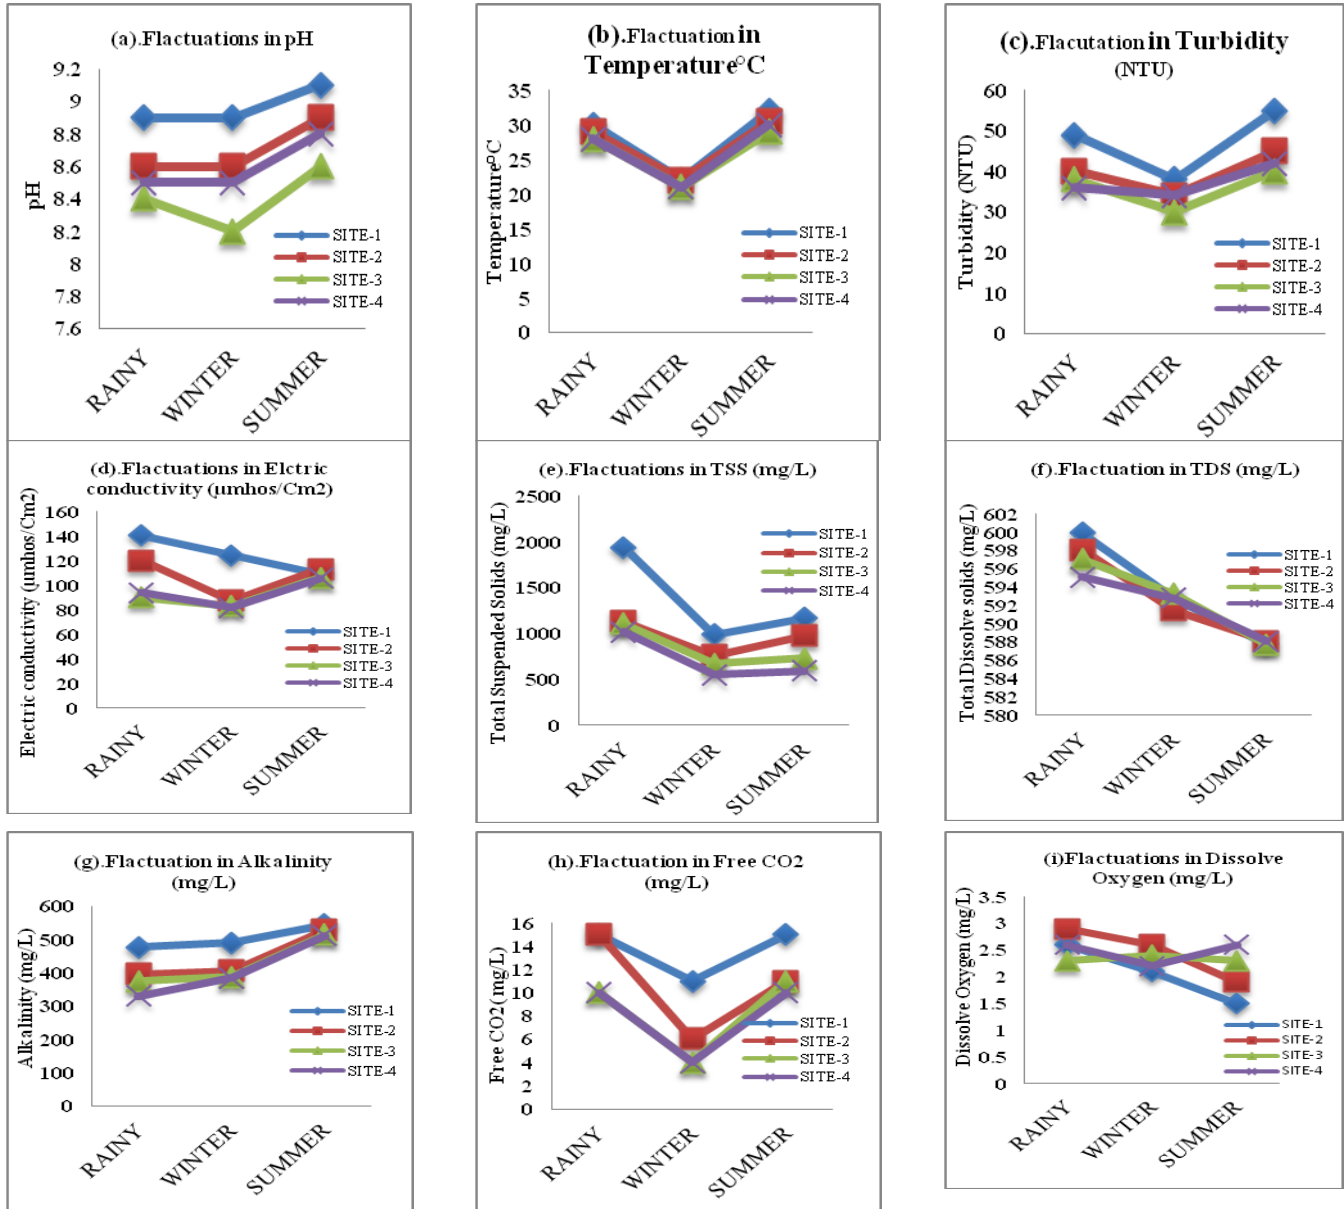


Figure.1. (a-i) show seasonal fluctuations in Ami River, (a). Fluctuations in pH, (b). Seasonal fluctuations in temperature, (c). Seasonal fluctuations in turbidity, (d). Fluctuations in electric conductivity, (e). Seasonal fluctuations in total suspended solids, (f). Fluctuations in total dissolve solids, (g). seasonal fluctuations in alkalinity, (h). Fluctuations in free carbon dioxide, (i). Seasonal fluctuations in dissolve oxygen. Figure shows seasonal variations in Ami River.

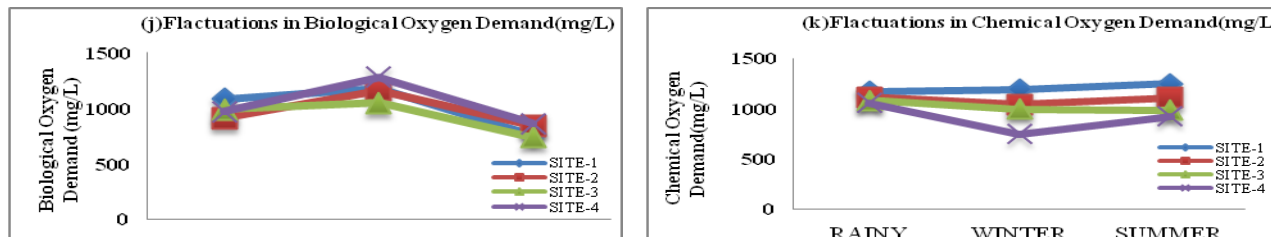


Figure.2. (j-k), seasonal fluctuations in Ami River (j). Show seasonal fluctuations in biochemical oxygen demand, (k) seasonal fluctuations in chemical oxygen demand in all three seasons (rainy, winter and summer).



Correlation matrix analysis

The correlation coefficient represents the relationship between the variables, and the measurement of one variable depends on the other variables or not. To determine the relationship between the physicochemical parameters of the water samples, correlation coefficients, have been recognized and a numerous significant correlations have been found [46]. A correlation matrix generated for 11 variables for three different seasons rainy, winter and summer (Table 4, 5, 6). The coefficient correlation ranges between -1 and + 1. The values found above 0.5 have been highlighted and considered the relationship study. If the correlation coefficient is between 0.5 and 0.8, a moderate relationship considered, and 0.8 or above indicated, a strong relationship [47]. During rainy a strongly positive correlation is observed (table-4) between pH and temperature (0.992795), temperature and turbidity (0.971215), TSS and alkalinity (0.972887), turbidity and alkalinity (0.967823), free CO₂ and alkalinity (0.941127), turbidity and free CO₂ (0.936971), BOD and TDS (0.973368), turbidity and pH (0.937923), alkalinity and temperature (0.914859), alkalinity and pH (0.882176), TSS and turbidity (0.886512), free CO₂ and TSS (0.868823), COD and TSS (0.844538), TSS and temperature (0.831618), free CO₂ and temperature (0.826811), TSS and pH (0.809891). The moderately positive correlation is observed between pH and free CO₂ (0.758266), COD and alkalinity (0.734934), free CO₂ and COD (0.681932), EC and TSS (0.67315). pH with TDS in rainy indicates the discharge of industrial effluents, sewage and human activities. In winter season (table 3), strongly correlated with temperature and DO (0.9983691), pH and Turbidity (0.9899495), EC and free CO₂ (0.9470013), TSS and COD (0.9416776), free CO₂ and alkalinity (0.960753), TSS and alkalinity (0.941127), turbidity and free CO₂ (0.936971), free CO₂ and COD (0.920931), pH and alkalinity (0.8615842), turbidity and alkalinity (0.8468408), pH and EC (0.8365084), turbidity and EC (0.8365084), temperature and TSS (0.8222244), temperature and free CO₂ (0.826811), pH and TSS (0.809891). the moderately positive correlation observed between pH and free CO₂ (0.7922812), COD and Alkalinity (0.7871503), EC and COD (0.7704759), temperature and COD, (0.7682275), pH and TSS (0.7601697), turbidity and free CO₂ (0.739923), temperature and turbidity (0.7071068), turbidity and TSS (0.7020685). Due to the dilution effect in winter, strong correlation between pH with EC, COD; EC with COD, BOD; TDS with COD; COD with BOD. During summer season observed a strongly positive correlation between pH and turbidity (0.9899495), BOD and COD (0.9872318), TSS and BOD (0.9827745), EC and TSS (0.9304548), TSS and COD (0.9416776), free CO₂ and DO (0.8932746), EC and BOD (0.8603284), pH and EC (0.8377537), turbidity and EC (0.8304599), temperature and TSS (0.8222244). The moderately positive correlation observed between temperature and BOD (0.792624), EC and COD (0.7697755), temperature and COD (0.7682275), pH and TSS (0.7601697), DO and alkalinity (0.7500565), temperature

and alkalinity (0.7320981), temperature and turbidity (0.7071068), turbidity and TSS (0.7020685). The strong correlation between pH and temperature, in rainy and winter, pH and turbidity in summer, DO and temperature. The correlation analysis is identified that EC, COD, BOD, CO₂, turbidity, TSS, alkalinity, observed higher-level correlation with water quality parameters in all seasons. The strong EC and TDS indicate that the suspension of salts, organic and inorganic pollution load is credited to EC. Though the positive correlation examined the water parameters is a sign that the anthropogenic and industrial activities were responsible for contamination of the assessed groundwater parameters in the study area [49]. Our results are agreed with Singh et al. [48].

IV. CONCLUSION

The current study reveals that total dissolved solids, TSS, BOD, and COD is above permissible limit given by C. P. C. B. which may be harmful to the ecosystem. This treated effluents released directly into the Ami River, which may severely affect aquatic organism growth in the river. There is an urgent requirement of planning by the civil body to combat the pollution rate in River. This program will help in supporting the ecology and aquatic life in the Ami River. This must go a long way towards saving Ami river from the ferocity of industrial pollution.

Conflicts Of Interest

The authors state that they do not have any conflicts of interest.

Acknowledgment

The authors are grateful to the faculty and head of the department (HOD) of Zoology, Natural product laboratory for analysis of water samples. DDU Gorakhpur University, Gorakhpur for their support to conduct this work.

V. REFERENCE

- [1] Patel SB, Mehta A, Solanki HA. (2017). Physiochemical Analysis of Treated Industrial Effluent Collected from Ahmadabad Mega Pipeline. *J Environ Anal Toxicol*, 7: 497. Doi: 10.4172/2161-0525.1000497.
- [2] Kannj I. and Achi O. (2011). Industrial Effluents and their impact on water quality of receiving rivers in Nigeria. *Journal of Applied Technology in Environmental Sanitation*, volume 1, (pp. 75-86).
- [3] Sala OE, Chapin FS, Armesto JJ, Berlow R, Bloomfield J, et. al. (2000). Global Biodiversity Scenarios for the Year 2100. *Science* 287: (pp.1770-1774.)
- [4] Dudgeon D, Arthington AH, Gessner MO, Kawabata ZI, Knowler DJ, et. al. (2006). Freshwater Biodiversity: Importance, Threats, Status and Conservation Challenges. *Biological Reviews* 81: (pp.163-182.)



- [5] Kennish MJ. Environmental Threats and Environmental Future of estuaries (2014). Environmental Conservation 29: (pp. 78-107).
- [6] Dhingra Priyanka, Singh Yashwant, Kumar Manish, Nagar Hitesh, Singh Karan, Laxmi Narayan Meena (2015). Study of Physico-Chemical Parameters of Waste Water Effluents from Industrial areas of Jaipur, Rajasthan, India. Int. Jou. Of Innovative Sci., Eng. & Tech, Vol.2, No. 5, (pp. 874-876).
- [7] Kumar, V., Kumar, S., Srivastava, S., Singh, J. and Kumar, P. (2017). Water quality of River Ganga with reference to physico-chemical and microbiological characteristics during Kanwar Mela at Haridwar, India: A case study. Archives of Agriculture and Environmental Science, 2018;3(1): (pp.58-63), <https://doi.org/10.26832/24566632.2018.030108>
- [8] Kumar, V., Singh, J. and Kumar, P. (2019). Heavy metal uptake by water lettuce (*Pistia stratiotes* L.) from paper mill effluent (PME): experimental and prediction modelling studies. Environmental Science and Pollution Research 26(14): 14400-14413, <https://doi.org/10.1007/s11356-019-04766-2>
- [9] Verma AK, and Saksena DN. (2010). Assessment of water quality and pollution status of Kalpi (Morar) River, Gwalior, and Madhya Pradesh: with special reference to conservation and management plan. Asian J Exp Biol Sci vol.1, no. (2), (pp.419–429).
- [10] Khan II, and Hazarika AK. (2012). Study of some water quality parameters of Kolong riverine system of Nagaon, India. Clarion 1(2): (pp.121–129).
- [11] Brar OS, and Jangu S. (2015a). Evaluation of water quality pollution indices for heavy metal contamination monitoring in the water of Harike wetland (Ramsar site), India. Int J Sci Res Publ, vol 5 no.2, (pp.1–6).
- [12] Bashir I, Lone FA, Bhat RA, Mir SA, Dar ZA, Dar SA. (2020). Concerns and threats of contamination on aquatic ecosystem. In: Hakem KR et al (eds) Bioremediation and biotechnology. Sher-e-Kashmir University of Agricultural Sciences and Technology, Jammu.
- [13] Ci Jun. (1969). Minamata disease and water pollution on industrial wastes. Review International Ocean Organizations. Med. Nos, (pp. 13-14).
- [14] Vi Jun, Gustar, R. (1947). The singularities in Japanese pollution and hazardous heavy metals. IRCWD News, No.6.WHO International Conference Centre for waste disposal 60.
- [15] Henze M, Harremoes P, Jansen JIC. 3rd ed. (2002). Wastewater Treatment: Biological and Chemical Processes: 3rd ed. Springer, Berlin.
- [16] M. Alkins-Koo, F.Lucas, L. Maharaj, S.Maharaj, D. Phillip, (2008). Ecological indicators 8:709.
- [17] Sangodoyin, A.Y. (1991). Ground water and surface water pollution by open refuse dump in Ibadan, Nigeria, Journal of discovery and Innovations 3(1): (pp. 24-31).
- [18] Ahmad, S., Farooq, S., Zahoor-Ul-Islam, Khan, Md. A., Zaidiand, W. A., and Matloob, H. (2017). Impact of urbanization on hydro logical regime in Indian cities. J. Environ. Res. Develop 2, (pp.594–604).
- [19] Marale, S. (2012). Shifting role of ecology in solving global environmental problems: selected practical tools. Environ. Develop. Sustain 14, (pp.869–884). doi: 10.1007/s10668-012-9362-8
- [20] Allee, R. J., and Johnson, J. E. (1999). Use of satellite imagery to estimate surface chlorophyll a and Secchi disc depth of Bull Shoals Reservoir, Arkansas, USA Int. J. Remote Sens 20, (pp.1057–1072). doi: 10.1080/0143116992 12849
- [21] Tiwari, S. K., Gupta, A. K., and Asthana, A. K. L. (2020). Evaluating CO₂ flux and recharge source in geothermal springs, Garhwal Himalaya, India: stable isotope systematics and geochemical proxies. Environ. Sci. Pollut. Res 27, (pp.14818–14835). doi: 10.1007/s11356-020- 07922-1
- [22] APHA (1998). Standard methods for examination of water and waste water. 20th Edition, American public health association, American Water Works Association and Water Environmental Federation, Washington, DC. USA.
- [23] Central Pollution Control Board (2019). Ministry Of Environment, Forest and Climate Change Government of India. Water Quality Criteria Updated On: 11 Oct 2019.
- [24] Murdoch T, Cheo M, O'Laughlin K. (2001). Streamkeeper's Field Guide: Watershed Inventory and Stream Monitoring Methods. Adopt-A-Stream Foundation, Everett, WA,(pp: 297).
- [25] Tiwari Bhagyashree and Singh Ajay (2020) .Impact of Various Industrial Effluents on Water Quality of River Aami and its Effect on Biochemistry of Fresh Water Inhabiting Fishes. WJPR, volume 9, issue 11, 961-976. Doi: 10.20959/wjpr202011-18697.
- [26] Rout SK, Pradhan S, Trivedi RK, Das BK. (2003). Impact assessment of the surroundings on water quality of Kulia Beel. Journal of Environment and Ecology 21(spl pub): (pp.54-58).
- [27] Lokhande RS, Singare PU, Pimple DS (2011). Study on physico-chemical parameters of waste water effluents from Talaja Industrial Area of Mumbai, India. International Journal of Ecosystem 1(1): (pp.1-9).
- [28] Siyanbola TO, Ajanaku KO, James OO, Olugbuyiro JAO, Adekoya JO. (2011). Physicochemical characteristics of industrial effluents in Lagos State, Nigeria. G. Journal of African Science and Technology 1(1): (pp.49-54).
- [29] Raji MIO, Ibrahim YKE, Tytler BA, Ehinmidu JO. (2015) Physico-chemical characteristics of water samples collected from River Sokoto, North-western Nigeria. Atmospheric and Climate Sciences 5: (pp, 194-199).



- [30] Wilde F .Temperature 6.1. In USGS Field Manual (2006). Retrieved from [http:// ater.usgs.gov/owq/Field Manual/Chapter6/6.1_ver2.pdf](http://ater.usgs.gov/owq/FieldManual/Chapter6/6.1_ver2.pdf).
- [31] Lloyd, Denby S. (1987). Turbidity as a water quality standard for salmonid habitats in Alaska. North American journal of fisheries management 7: (pp. 34-45).
- [32] Swanson HA, Baldwin HL. (1965). A Primer on Water Quality. US Geological Survey.
- [33] Morrison G, Fatoki OS, Persson L, Ekberg A. (2001). Assessment of the impact of point source pollution from the Keiskamma River-pH, electrical conductivity, oxygen-demanding substance (COD) and nutrients. Water Sa 27: (pp.475-480).
- [34] Sediment Transport and Deposition. Available online: <https://www.fondriest.com/environmental-measurements/parameters/hydrology/sediment-transport-deposition/>. Accessed on 1 May 2022.
- [35] Haramoto, E.; Kitajima, M.; Kishida, N.; Katayama, H.; Asami, M.; Akiba, M. (2012). Occurrence of Viruses and Protozoa in Drinking Water Sources of Japan and Their Relationship to Indicator Microorganisms. Food and Environmental Virology 4(3), (pp.93-101). <http://doi.org/10.1007/s12560-012-9082-0>.
- [36] Bilotta GS, Brazier RE. (2008). Understanding the influence of suspended solids on water quality and aquatic biota. Water research 42: (pp.2849-2861).
- [37] Vishwakarma P. K, Dr. Pandey, G. (2013). Study on Water Quality of Ami River in Uttar Pradesh. International Journal of Engineering Research & Technology (IJERT) Vol. 2 Issue 12, IJERT ISSN: 2278-0181.
- [38] Niels, D.T.; Seid, T.M.; Peter, L.; Goethals, M.; Pieter, B.(2016). Water Quality Assessment of Streams and Wetlands in a Fast Growing East African City. Water, 8,123. <https://doi.org/10.3390/w8040123>.
- [39] Rubel, M.D.; Shahidul, I.; Sheik, A.; Mohammad, H.U. (2019). An Assessment on Different Solids Dissolved Oxygen in Industrial Effluents and Its Impact on Public Health. American Journal of Biomedical Science & Research 5, (pp.382-390). <https://doi.org/10.34297/AJBSR.2019.05.000951>.
- [40] Connolly, N.M.; Crossland, M.R.; Pearson, R.G. (2004). Effect of low dissolved oxygen on survival, emergence, and drift of tropical stream macro invertebrates. Journal of the North American Benthological Society 23, (pp.251-270). 10.1899/0887-3593(2004)023<0251: EOLDOO>2.0.CO; 2.
- [41] Nakazawa, M.S.; Keith, B.; Simon, M.C. (2016). Oxygen availability and metabolic adaptations. Nature Review Cancer 16, (pp.663-673). <https://doi.org/10.1038/nrc.2016.84>.
- [42] Bhat, S.U.; Qayoom, U. (2021). Implications of Sewage Discharge on Freshwater Ecosystems. In Sewage - Recent Advances, New Perspectives and Applications; Zhang, T., Ed. Intech Open: London, UK, <https://doi.org/10.5772/intechopen.100770>.
- [43] Meng, F.; Yang, A.; Zhang, G.; Wang, H. (2017). Effects of dissolved oxygen concentration on photosynthetic bacteria wastewater treatment: Pollutants removal, cell growth and pigments production. Bioresources Technology 241, (pp.993-997). <https://doi.org/10.1016/j.biortech.2017.05.183>.
- [44] Wetzel RG. (2001). Limnology; lake and River Ecosystem 3rd edn. Academic Press New York (pp: 1006).
- [45] Science for Environment Policy. Ecosystem Services and the Environment. In-depth Report 11 produced for the European Commission, DG Environment by the Science Communication Unit, 2015.
- [46] Usharani, K., Umarani, K., Ayyasamy, P.M., Shanthi, K. and Lakshmanaperumal-samy, P. (2010). Physico-Chemical and Bacteriological Characteristics of Noyyal River and Ground Water Quality of Perur, India. Journal of Applied Sciences and Environmental Management 14 (2): (pp.29 -35).
- [47] Vishwakarma, C.A., Sen, R., Singh, N., Singh, P., Rena, V., Rina, K. and Mukherjee, S.(2019). Geochemical Characterization and Controlling Factors of Chemical Composition of Spring Water in a Part of Eastern Himalaya Geochemical Characterization and Controlling Factors of Chemical Composition of Spring Water in a Part of Eastern Himalaya. Journal of Geological Society of India, 92: 753, <https://doi.org/10.1007/s12594-018-1098-0>.
- [48] Singh Yuvraj and Jain MK. (2021). Pearson's correlation and trend analysis for physico-chemical parameters of Mansagar Lake, Jaipur. Preprints (www.preprints.org), 2021; doi:10.20944/preprints20109.0237.v1.
- [49] T. Mohanakavitha, K. Shankar, R. Divahar, T. Meenambal and R.Saravanan. (2019). Impact of industrial wastewater disposal on surface water bodies in Kalingarayan canal, erode district, Tamil Nadu, India. Archives of Agriculture and environment Science 4(4): (pp.379-387) <https://doi.org/10.26832/24566632.2019.040403>.

IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

ABOUT IJEAST

International Journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high-quality research papers in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

FOCUS AREAS

- Engineering
- Applied Science
- Technology
- Innovation & Development
- Interdisciplinary Studies



PEER REVIEWED

All submissions are rigorously peer reviewed to ensure quality.



OPEN ACCESS

Free and unrestricted access to research for all.



GLOBAL REACH

Connecting researchers and professionals worldwide.



TIMELY PUBLICATION

We ensure a swift and efficient publication process.



For more information, visit our website
www.ijeast.com



INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

✉ editor@ijeast.com

🌐 www.ijeast.com

📍 India



2455-2143