



# IJEAST

INTERNATIONAL JOURNAL  
OF ENGINEERING APPLIED SCIENCE  
AND TECHNOLOGY



VOLUME : 2      ISSUE : 1      Print / Issue Publication Date: 31-Dec-2016



ISSN : 2455-2143



Indexed In



[WWW.IJEAST.COM](http://WWW.IJEAST.COM)

[editor@ijeast.com](mailto:editor@ijeast.com)



# STUDY OF FINGERO-IMBIBITION IN DOUBLE PHASE FLOW THROUGH POROUS MEDIA WITH MAGNETIC FLUID USING NUMERIC TECHNIQUE

Priti V. Tandel

Department of Mathematics

Veer Narmad South Gujarat University,

Surat, Gujarat, India

**Abstract**—This Paper deals with the phenomena of Fingero-Imbibition in double phase flow through porous homogeneous, cracked and slightly dipping porous media involving magnetic fluid. This phenomenon arises on account of simultaneous occurrence of two important phenomena viz. imbibition and fingering. In the whole study it is assumed that injection of preferentially wetting, less viscous fluid (viz. injection fluid) into porous medium saturated with resident fluid. (viz. native fluid) is initiated under imbibition and in consequence, the resident fluid is pushed by drive in secondary recovery process. This conjoint phenomenon is known as Fingero-Imbibition.

**Keywords**— Fingero-Imbibition, Porous Medium, SOR

## I. INTRODUCTION

When a porous medium filled with some resident fluid is brought into contact with another fluid which preferentially wets the medium, there is a spontaneous flow of the wetting fluid into the medium and a counter flow of the resident fluid from the medium. Such a phenomena arising due to the difference in wetting abilities is called counter-current imbibition. Similarly, when a fluid contained in a porous medium is displaced by another fluid of lesser viscosity, instead of regular displacement of whole front, protuberances (fingers) may occur which shoot through the porous medium at relatively great speeds. This phenomenon is called fingering or instabilities. The phenomena of fingering and imbibition occurring simultaneously in displacement process are known as Fingero-Imbibition [1]. This phenomena gained much current importance due to their frequent occurrence in the problem of petroleum technology. Many authors have discussed them from different point of view.

In this paper, the underlying assumptions are that the two fluids are immiscible and the injected fluid is less viscous as well as preferentially wetting with respect to porous materials and with capillary pressure.

The mathematical formulation of basic equations yields a no-linear partial differential equation. A numerical solution is obtained by Successive Over Relaxation Method..

## II. STATEMENT OF THE PROBLEM

We consider here a finite cylindrical mass of porous medium of length  $L (=1)$  saturated with native liquid (o), is completely surrounded by an impermeable surface except for one end of the cylinder which is labeled as the imbibition face ( $x=0$ ) and this end is exposed to an adjacent formation of 'injected' liquid (w) which involves a thin layer of suitable magnetic fluid. It is assumed that the later fluid is preferentially wetting and less viscous. This arrangement gives rise to a displacement process in which the injection of the fluid (w) is initiated by imbibition and the consequent displacement of native liquid (o) produces protuberances (fingers). This arrangement describes a one – dimensional phenomenon of Fingero-Imbibition.

## III. FORMULATION OF THE PROBLEM

Assuming that the flow of two immiscible phases is governed by Darcy's law, we may write the seepage velocity of injected and native fluid as,

$$V_w = -\frac{k_w}{\mu_w} k \frac{\partial P_w}{\partial x} \quad (A)$$

$$V_o = -\frac{k_o}{\mu_o} k \frac{\partial P_o}{\partial x} \quad (B)$$



If we take the injected liquid containing a thin layer of magnetic fluid where magnetization  $M$  is assumed to be directly proportional to the magnetic field intensity  $H$  (i.e.  $M = \lambda H$ ) and the microscopic behavior of fingers is governed by statistical treatment. Then additional pressure exerted due to pressure of a layer of magnetic fluid in the displacing liquid ( $w$ ) represented by  $\left[ \mu_0 \lambda + \frac{16\lambda\mu_0\lambda^2 r^3}{g(1+2)^3} \right] \frac{\partial H}{\partial x}$ .

Therefore from (A) and (B)

$$V_w = - \left( \frac{k_w}{\mu_w} \right) k \left[ \frac{\partial P_w}{\partial x} + \gamma H \frac{\partial H}{\partial x} \right] \quad (1)$$

$$V_o = - \left( \frac{k_o}{\mu_o} \right) k \left[ \frac{\partial P_o}{\partial x} \right] \quad (2)$$

$$\text{Where } \gamma = \mu_0 \lambda + \frac{16\lambda\mu_0\lambda^2 r^3}{g(1+2)^3}$$

$k$  = Permeability of the homogeneous medium

$k_w$  = Relative permeability of injected fluid is assumed to

be functions of  $S_w$

$k_o$  = Relative permeability of native fluid, is assumed to

be functions of  $S_o$ .

$P_w$  = Pressures of injected fluid

$P_o$  = Pressures of native fluid

$\mu_o, \mu_w$  = Constant viscosities

$S_w$  = Saturation of injected fluid

$S_o$  = Saturation of native fluid

$g$  = Acceleration due to gravity.

Neglecting the variation in phase densities, the equation of continuity for injected fluid can be written as:

$$\phi \frac{\partial S_w}{\partial t} + \frac{\partial V_w}{\partial x} = 0 \quad (3)$$

$$\phi \frac{\partial S_o}{\partial t} + \frac{\partial V_o}{\partial x} = 0 \quad (4)$$

Where  $\phi$  is the porosity of the medium.

From the definition of phase saturation, it is obvious that

$$S_w + S_o = 1 \quad (5)$$

The analytic condition (Scheidegger, 1960) [2] governing imbibition phenomenon is

$$V_w + V_o = 0 \quad (6)$$

The capillary pressure ( $P_c$ ), defined as the pressure discontinuity of the flowing phases across their common interface, may be written as :

$$P_c = P_o - P_w \quad (7)$$

Substituting (1) and (2) in (6), we have

$$\left( \frac{k_w}{\mu_w} \right) k \left[ \frac{\partial P_w}{\partial x} + \gamma H \frac{\partial H}{\partial x} \right] + \left( \frac{k_o}{\mu_o} \right) k \left[ \frac{\partial P_o}{\partial x} \right] = 0 \quad (8)$$

Using (7), equation (8) reduces to the form,

$$\left( \frac{k_w}{\mu_w} \right) k \left[ \frac{\partial P_w}{\partial x} + \gamma H \frac{\partial H}{\partial x} \right] + \left( \frac{k_o}{\mu_o} \right) k \left[ \frac{\partial P_c}{\partial x} + \frac{\partial P_w}{\partial x} \right] = 0 \quad (9)$$

$$\frac{\partial P_w}{\partial x} = - \left[ \frac{\left( \frac{k_o}{\mu_o} \right) \frac{\partial P_c}{\partial x} + \left( \frac{k_w}{\mu_w} \right) \gamma H \frac{\partial H}{\partial x}}{\left( \frac{k_o}{\mu_o} + \frac{k_w}{\mu_w} \right)} \right] \quad (10)$$

From (1) and (10), we get,

$$V_w = \left( \frac{k_w k_o}{\mu_o k_w + \mu_w k_o} \right) k \left[ \frac{\partial P_c}{\partial x} - \gamma H \frac{\partial H}{\partial x} \right] \quad (11)$$

From (3) and (11), we get,

$$\phi \frac{\partial S_w}{\partial t} + \frac{\partial}{\partial x} \left[ \left( \frac{k_w k_o}{\mu_o k_w + \mu_w k_o} \right) k \left[ \frac{\partial P_c}{\partial x} - \gamma H \frac{\partial H}{\partial x} \right] \right] = 0 \quad (12)$$

This is the desired non-linear partial differential equation describing the fingero-imbibition phenomenon for the flow of two immiscible phases through porous media. Since the present investigation involves injected fluid and a viscous native fluid, therefore according to Scheidegger (1960) approximation, we may write eq. (12) in the form

$$\phi \frac{\partial S_w}{\partial t} + \frac{\partial}{\partial x} \left[ \left( \frac{k_o}{\mu_o} \right) k \left[ \frac{\partial P_c}{\partial x} - \gamma H \frac{\partial H}{\partial x} \right] \right] = 0 \quad (13)$$

$$\text{As } \frac{k_w k_o}{\mu_o k_w + \mu_w k_o} \approx \frac{k_o}{\mu_o}$$

At this state, for definiteness of the mathematical analysis, we assume that standard relationship due to Scheidegger and Johnson [3], Muskat [4], between phase saturation and relative permeability as

$$k_w = S_w, k_o = S_o = 1 - S_w, P_c = -\beta S_w \quad (14)$$

Where  $\beta$  is the capillary pressure co-efficient.

From (13) and (14), we get



$$\phi \frac{\partial S_w}{\partial t} + \frac{k}{\mu_o} \frac{\partial}{\partial x} \left[ (1 - S_w) \left[ -\beta \frac{\partial S_w}{\partial x} - \gamma H \frac{\partial H}{\partial x} \right] \right] = 0 \quad (15)$$

Considering the magnetic fluid H in the x-direction only, we may write (3),  $H = \frac{A}{x^n}$ , where A is a constant parameter and n is an integer. Using the value of H for  $n = -1$  in eq.(15), we get,

$$\phi \frac{\partial S_w}{\partial t} + \frac{k}{\mu_o} \frac{\partial}{\partial x} \left[ (1 - S_w) \left[ -\beta \frac{\partial S_w}{\partial x} - \gamma \Lambda^2 x \right] \right] = 0$$

or

$$\phi \frac{\partial S_w}{\partial t} - \frac{k\beta}{\mu_o} \frac{\partial}{\partial x} \left[ (1 - S_w) \frac{\partial S_w}{\partial x} \right] - \frac{k\gamma\Lambda^2}{\mu_o} \frac{\partial}{\partial x} [(1 - S_w)x] = 0 \quad (16)$$

A set of suitable initial and boundary conditions associated to problem (16) are

$$s_w(x, 0) = s_c, \text{ for } x > 0 \quad (17)$$

$$s_w(0, t) = s_0; s_w^*(L, t) = s_1 \text{ for } t \geq 0 \quad (18)$$

Equation (18) is reduced to dimensional form by setting

$$X = \frac{x}{L}, \quad T = \frac{k\beta}{\mu_o L^2 \phi} t, \quad s_w^*(X, t) = 1 - s_w(x, t)$$

And then eq. (18) takes the form

$$\frac{\partial S_w}{\partial T} = \frac{\partial}{\partial X} \left[ S_w \frac{\partial S_w}{\partial X} \right] - C_0 \frac{\partial}{\partial X} [S_w X] \quad (19)$$

$$\text{Where } C_0 = \frac{\gamma \Lambda^2 L^2}{\mu_o}$$

$$\frac{\partial S_w}{\partial T} = \frac{\partial}{\partial X} \left[ S_w \frac{\partial S_w}{\partial X} \right] - C_0 X \frac{\partial S_w}{\partial X} - C_0 S_w \quad (20)$$

With boundary conditions

$$s_w(X, 0) = 1 - s_c, \text{ for } 0 < X \leq L \quad (21)$$

$$s_w(0, T) = 1 - s_0; s_w(L, t) = 1 - s_1 \text{ for } t \geq 0 \quad (22)$$

In eq. (20), the asterisk is dropped for simplicity. Eq. (20) is desired non-linear partial differential equation for the flow of two immiscible liquids in homogeneous medium with effect of magnetic fluid.

#### IV. MATHEMATICAL SOLUTION

Using finite differences for (20),

$$S_{w,m,n+1}$$

$$= (1 - kc_0)S_{w,m,n} + \frac{r}{2} [S_{w,m+1,n}^2 - 2S_{w,m,n}^2 + S_{w,m-1,n}^2] - \frac{c_0 r h x_m}{2} (S_{w,m+1,n} - S_{w,m-1,n})$$

Using Gauss-Seidal Method,

$$S_{w,m,n+1} = (1 - kc_0)S_{w,m,n} + \frac{r}{2} [S_{w,m+1,n}^2 - 2S_{w,m,n}^2 + S_{w,m-1,n+1}^2] - \frac{c_0 r h x_m}{2} (S_{w,m+1,n} + S_{w,m-1,n+1}) \quad (23)$$

Using Successive –Over Relaxation Method,

Let

$$C_m = (1 - kc_0)S_{w,m,n} + \frac{r}{2} [S_{w,m+1,n}^2 - 2S_{w,m,n}^2] - \frac{c_0 r h x_m}{2} S_{w,m+1,n}$$

From (23) we have,

$$S_{w,m,n+1} = C_m + \frac{r}{2} S_{w,m-1,n+1}^2 + \frac{c_0 r h x_m}{2} S_{w,m-1,n+1}$$

$$S_{w,m,n+1}$$

$$= S_{w,m,n} + \omega \left[ C_m + \frac{r}{2} S_{w,m-1,n+1}^2 + \frac{c_0 r h x_m}{2} S_{w,m-1,n+1} - S_{w,m,n} \right] \quad (24)$$

$$\text{Let } k = 0.01, h = 0.1, c_0 = 0.85, \omega = 1.7$$

From (24) we have

$$S_{w,m,n+1}$$

$$= -0.7S_{w,m,n} + 1.7 \left[ C_m + 0.5S_{w,m-1,n+1}^2 + 0.0425x_m S_{w,m-1,n+1} \right]$$

Numerical values are shown by the following table.

|    | T=0.01    | T=0.02    | T=0.03    | T=0.04     |
|----|-----------|-----------|-----------|------------|
| x  | $S_w$     |           |           |            |
| 0. | 0.5       | 0.5       | 0.5       | 0.5        |
| 0. | 0.2161125 | 0.3509535 | 0.3655792 | 0.3885172  |
| 0. | 0.0428217 | 0.1488194 | 0.2280581 | 0.27365482 |
| 0. | 0.0024868 | 0.0244896 | 0.0722417 | 0.13179382 |
| 0. | 0.0000771 | 0.0012927 | 0.0077935 | 0.02613975 |
| 0. | 0.0000027 | 0.0000507 | 0.0003831 | 0.00190174 |
| 0. | 0.0000001 | 0.0000023 | 0.0000190 | 0.00010421 |
| 0. | 0.0000000 | 0.0000001 | 0.0000010 | 0.00000077 |
| 0. | 0.0000000 | 0.0000000 | 0.0000000 | 0.00000053 |
| 0. | 0.0       | 0.0       | 0.0000001 | 0.0000004  |





|    |     |     |     |     |
|----|-----|-----|-----|-----|
| 1. | 0.0 | 0.0 | 0.0 | 0.0 |
|----|-----|-----|-----|-----|

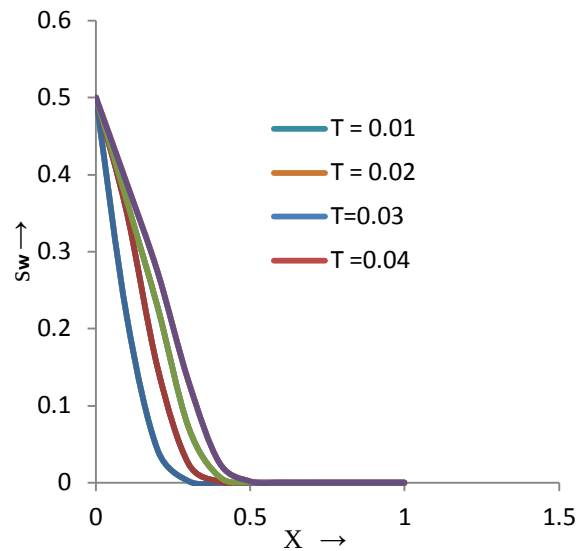


Figure –a: Length (X) → Saturation( $S_w$ )

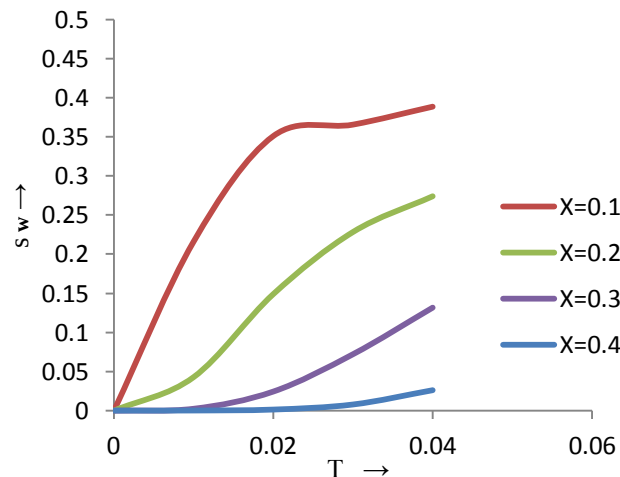


Figure – b :Time (T) → Saturation( $S_w$ )

that as time (T) increases saturation ( $S_w$ ) increases. Keeping X constant, for different values of (T) the saturation ( $S_w$ ) increases parabolically as time (T) increases. From both the graphs, it is clear that the curves are of parabolic type. Again it is clear that the governing equation is parabolic.

## VI. REFERENCES

1. Verma A.P. (1970), Fingero – Imbibition in slightly dipping Porous Medium, Journal of Applied Physics, (USA), 41, 3638.
2. Scheidegger, A.E. (1960): The Physics of Flow Trough Porous Media, University Of Toronto Press, Toronto, 216,229.
3. Scheidegger, A.E. and Johnson, E.F. (1961), Canadian Journal of Physics, 39,326.
4. Muskat, M. (1949): Physical Principles of Oil Production, Mcgrew Hill Book Co.Inc., New York.
5. M.K. Jain: Numerical Solution of Differential Equations (2<sup>nd</sup> Edition).
6. S.S.Shastry: Introductory Methods of Numerical Analysis (4<sup>th</sup> Edition).
7. Free boundary value problems arising in the context of fluid flow through porous media using Numerical techniques- Ph.D. Thesis submitted by Priti Tandel under guidance of Dr. P.H.Bhathawal.

## V. INTERPRETATION

From figure-a, we can say that as X increases the saturation ( $S_w$ ) decreases. Keeping T constant as X increases saturation decreases parabolically. From figure-b, it is clear

# IJEAST

INTERNATIONAL JOURNAL  
OF ENGINEERING APPLIED SCIENCE  
AND TECHNOLOGY

## ABOUT IJEAST

International Journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high-quality research papers in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

## FOCUS AREAS

- Engineering
- Applied Science
- Technology
- Innovation & Development
- Interdisciplinary Studies



### PEER REVIEWED

All submissions are rigorously peer reviewed to ensure quality.



### OPEN ACCESS

Free and unrestricted access to research for all.



### GLOBAL REACH

Connecting researchers and professionals worldwide.



### TIMELY PUBLICATION

We ensure a swift and efficient publication process.



For more information, visit our website

**[www.ijeast.com](http://www.ijeast.com)**



**INTERNATIONAL JOURNAL**  
OF ENGINEERING APPLIED SCIENCE  
AND TECHNOLOGY

✉ [editor@ijeast.com](mailto:editor@ijeast.com)

🌐 [www.ijeast.com](http://www.ijeast.com)

📍 India



2455-2143