



MICROSTRIP PATCH ANTENNA ENHANCEMENT TECHNIQUES: A SURVEY

K. Mahendran

Assistant professor/ Department of ECE
CK College of engineering and technology,
Cuddalore, Tamil Nadu, India

K. Dhivya , V. Prasanniya

Final Year, Department of ECE
CK College of engineering and technology,
Cuddalore, Tamil Nadu, India

Abstract— Microstrip patch antennas are widely used in many wireless communication applications because of their various advantages such as light weight, compact size, inexpensive, ease of fabrication and high reliability. However, narrow bandwidth and low gain are the major drawbacks of microstrip antennas. The radiation properties of microstrip antenna is affected by many designing factors like feeding techniques, manufacturing substrate, patch and ground structure. This manuscript presents a review of the most popular gain and bandwidth enhancement methods of microstrip antenna and reports a brief description of its feeding techniques.

Keywords— Split Ring Resonators, Metamaterials (MTM)

I. INTRODUCTION

With the dynamic development in wireless communication technology, the need for compact size, light weight, cost effective and low profile antenna has increased significantly. Microstrip antennas were designed to achieve these requirements. Microstrip antenna is formed conventionally by a dielectric substrate covered with two metallic sheets on both sides; one of them is the radiating patch while the other is the ground. Patches can be in many different geometrical shapes like rectangular, circular, triangular, square etc. Microstrip antennas are widely utilized because of being compact, low cost, conformal and suitable to integrate with Radio Frequency (RF) devices. In addition, they can provide feed flexibility, different polarizations, multiband, and beam steering [1]. In spite of these advantages, the main problems of microstrip antennas are narrow bandwidth and low gain which restrict them from many wireless communication systems. Three kinds of losses degrade the performance of the microstrip antenna: Dielectric loss, conductor loss and surface wave loss. The dielectric loss and the conductor loss rely on the quality of the manufacturing materials of the substrate and conductors respectively. With high quality selection of substrate and conductor, dielectric and conductor losses can be reduced therefore the gain of the antenna will be enhanced. The gain can be further enhanced by suppressing surface wave. The surface waves reduce the efficiency of the antenna as a part of the available power trapped in the substrate layer. The

substrate permittivity and thickness has a significant effect on the propagation of surface waves [2, 3].

In recent times, many attempts have been presented to overcome the microstrip antenna limitations. High impedance surfaces, like electromagnetic band gap (EBG), are used to reduce the losses of surface wave are by utilizing hybrid substrates [4], by using superstrate [5] etc. However, the main problem of these methods is the fabrication complexity due to the large number of vias and holes required in these techniques. Another simple technique, known as suspended patch antenna, is used to reduce the surface wave by replacing the substrate with air or very low dielectric constant material [6]. The suspended patch antenna needs an air gap which is formed by a spacing material like foam for fabrication but the antenna becomes fragile and not durable, hence it is unsuitable for mass production. For more practical fabrication process, lower dielectric constant can be achieved by partially removing the substrate surrounding the patch [7]. The direct way to enhance the bandwidth of the microstrip antenna is to increase the substrate thickness, but the efficiency decreases due to the large amount of input power dissipated in the resistor which reduces the amount of radiated power. Many techniques were developed to enhance the microstrip patch antenna performance such as slotted patch antenna, parasitic patch, defective or partial ground structures, patch array, metallic rings, and reflecting layer [8]-[12]. Hence, the main aim of this paper is to present a survey of the enhancement techniques of gain as well as bandwidth of microstrip patch antennas which has triggered many novel antenna applications. In addition, a brief review of various feeding techniques of microstrip antenna is also presented.

II. GAIN AND BANDWIDTH ENHANCEMENT TECHNIQUES

Numerous techniques are adopted recently to improve the gain, bandwidth and efficiency of microstrip antennas. A brief insight about these popular techniques is outlined as follow:

A. Slotted Patch

The conventional microstrip antenna has narrow bandwidth; one of popular techniques to enhance the bandwidth is done by cutting slots in the patch of half wavelength along the desired resonance frequency [8]. The slots are implanted on the patch to enhance the impedance matching, especially at higher frequencies. The current distribution on the patch is changed as a result of the cut slots, hence the input impedance and current path length changes [9]. By adding new slots into the patch, new resonance frequencies are created. The positions and dimensions of the slots should be properly optimized where the first two broadside radiation modes of the radiating patch are perturbed where the resonance frequencies of the patch become close to each other to achieve a wider bandwidth [10].

Cutting slots method on the radiating patch is effectively used to reduce the size of the microstrip antenna and create multiple frequency bands at the desired frequency range by optimizing the slots configurations to produce the desired resonant mode. Slots cut into the patch are of different shapes. The commonly utilized slots are U-slot, H-slot, T-slot, E-slot etc. Bandwidth of 30.3% has been achieved by etching an Eshaped slot in a rectangular patch [11]. Impedance bandwidth of 26% is achieved by cutting a U-shaped slot in [8]. In [12], a design of C-slotted patch is proposed to enhance the gain and provide a bandwidth of 50% from 1 GHz to 3 GHz. The design of the C-slot antenna is shown in Fig. 1

The bandwidth of microstrip antenna relies on the quality factor. Hence, when the patch id is modified by slots, it stores less energy beneath the patch and the quality factor degrades. So, it provides higher radiation [1]. A circular patch with mirrored horizontal slots is designed by Ahsan et al. [13] as shown in Fig. 2. This configuration can achieve lower resonance frequencies due to the extension of the current distribution with the fundamental resonant mode.

B. Parasitic Patch/Multi-Resonator

In this method, additional resonators are utilized to improve the bandwidth and the gain of the microstrip antenna. The parasitic patches are coupled to main patch. Two different configurations of parasitic patch are used which are coplanar technique and multilayer technique. These techniques are outlined in the following subsections.

1. Coplanar Techniques

In coplanar technique, additional patches are incorporated on a single plane above the substrate. The excitation is given to a patch which is called the main patch or the active patch. The parasitic patch is excited if it is placed near to the active patch because of the direct coupling between them.

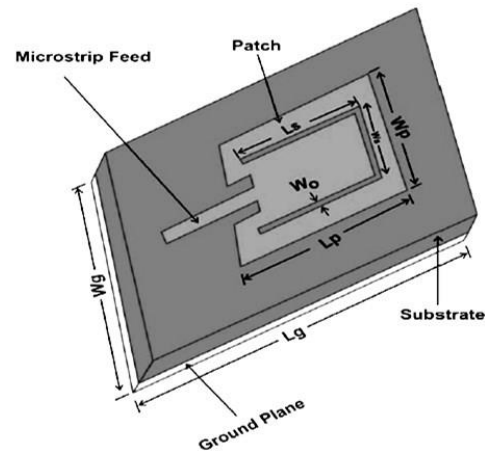


Fig. 1 C-Shaped Slotted Antenna

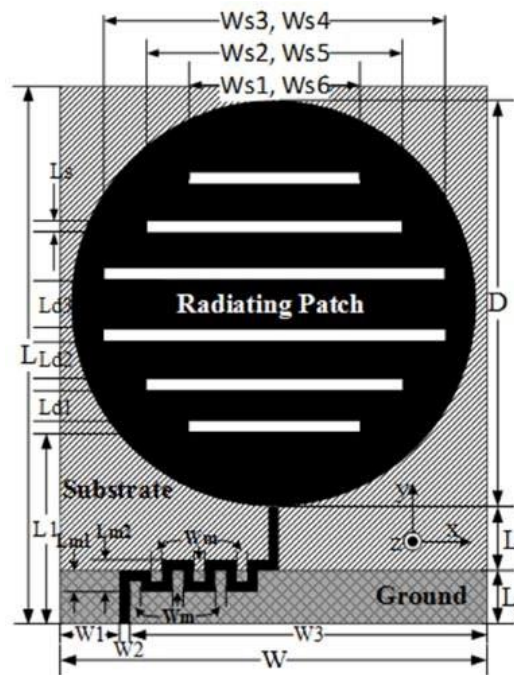


Fig. 2 Circular patch antenna with horizontal slots

Wider bandwidth can be accomplished if the resonance of the active patch is close to the resonance of the parasitic patch. Parasitic patches can be single patch or two symmetrical patches along the main patch edges. For rectangular patch antenna, the edges along the width of the patch are known as the radiating edge while the edges along the length are known as the non-radiating edge. In case of placing a parasitic patch on one of the radiating edges, a wide bandwidth is achieved, however this leads to 45 degrees shift of the beam maxima and the radiation pattern becomes unsymmetrical along the broadside direction. To achieve a symmetrical pattern, two equal gap coupled patches are utilized on the both radiating edges of the patch where the net effect on the beam shift is

zero. Three resonant frequencies can be generated by using two different lengths of the parasitic patches. It may lead to shift of the beam maxima but the shift is acceptable. U-shaped parasitic patches which are placed along the radiating edges are shown in Fig. 3 [14].

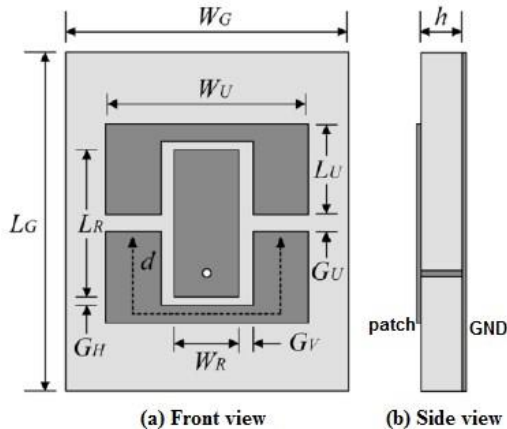


Fig. 3 U-shaped parasitic patch geometry

Different configurations of directly and indirectly coupled parasitic patches have been designed in [15]. The impedance bandwidth has increased from 2% up to 12.7%. The proposed antenna provides six times the conventional antenna. Utilizing parasitic patches may increase the antenna size however; the bandwidth is higher compared to a single patch antenna.

B. Parasitic Patch/Multi-Resonator

In this method, additional resonators are utilized to improve the bandwidth and the gain of the microstrip antenna. The parasitic patches are coupled to main patch. Two different configurations of parasitic patch are used which are coplanar technique and multilayer technique. These techniques are outlined in the following subsections.

2. Multilayer/Stacked Techniques

In multilayer structure, a patch is used above another one with superseding dielectric substrate in between. This makes two or more patches to share the same aperture area. In this configuration, lower dielectric constant material is usually added above the radiating patch to minimize the effective permittivity of the multilayer antenna. This increases the gain of the antenna. A stacked antenna provides a compact size and helps to reduce the surface wave losses [16]. The most popular coupling techniques in multilayer structure are electromagnetic coupled and aperture coupled microstrip antenna. Multilayer structure is utilized to provide a wide bandwidth of 114% with two resonance frequencies within the band 3 GHz up to 11 GHz [17]. The design presents additional c-slot in the ground plane and the bandwidth is enhanced more by etching E-slot on the parasitic patch. At the centre frequency 7 GHz, 12 dB gain is obtained. There are two configurations of electromagnetically coupled multilayer patch antenna. The lower patch is fed with coaxial cable while the

upper patch is excited by electromagnetic coupling. Patches are fabricated on different substrate materials and air gap is introduced between the two materials.

C. Metallic Rings

For circular patch antenna, metallic rings around the active patch are used to scatter the surface wave to enhance the radiation. When electromagnetic waves hit an interface that has small dimensions compared to the wavelength of the incident wave, the electromagnetic waves are scattered in all directions [18]. The scattered waves are added to the incident waves resulting in-phase and out-of-phase interference and the rest can reradiate by the antenna. Based on this concept, placing metallic rings around the main patch helps scatter the surface waves and to convert it to space wave to enhance the gain of the microstrip patch antenna. Circular patch antenna surrounded by two metallic rings is proposed. The proposed design provides enhancement of 6.7 dB in the gain compared to the conventional antenna without the metallic rings.

D. EBG

EBG structures are artificial periodic dielectric materials that produce stop band and pass band properties. The periodic nature of EBG structure suppresses the propagation of surface waves within a certain frequency, called a band gap, which provides additional control of the electromagnetic waves compared to conventional filtering and guiding structures. Surface wave suppression provides a significant improvement of the maximum gain, bandwidth and efficiency when EBG is utilized in the microstrip antenna as the generation of surface waves degrades the radiation pattern and the antenna efficiency. Structures of EBG are realized by periodic configuration of dielectric substrate materials or metallic conductor as an artificial magnetic ground plane. In other words, EBG can be achieved by drilling a periodic pattern of holes in the substrate material or by etching a periodic configuration in the ground plane. The properties of EBG rely on the size, shape, symmetry and the used material in their configuration.

E. Defected Ground Structure (DGS)

The geometry and dimensions of the ground plane have a significant effect on the excitation mode and the operating bandwidth of the microstrip antenna. Defected ground structures may be accomplished by cutting a defect of any configuration on the ground plane. This defect disturbs the current distribution in the ground plane and helps control input impedance and excitation of radio waves in the substrate. The ground defect may be varied accordingly from simple configuration to more complex configuration to achieve the optimum performance. However, the absence of the conducting ground may lead to the increase of the back lobe radiation to enhance the directivity; a reflecting layer behind the antenna is used to reflect back the back lobe radiation [19].



Defected ground structure and EBG have similar microwave circuit properties to provide a band stop or band pass like filter. A large area is required to construct the periodic pattern EBG implementation. In addition, defining the unit element of EBG is difficult whereas defected ground structures can be one or few etched shapes which do not need for a large implementation area and it can easily define the unit element. The effect of hexagonal shape defected ground structure is proposed in [20] to provide significant enhancement of the radiation characteristics by suppressing of the surface wave.

F. Partial Substrate Removal

The substrates are used mainly to provide mechanical strength to the microstrip antenna. The substrate material has a significant effect on the microstrip antenna parameters such as the bandwidth, radiation pattern, gain and efficiency. The partial substrate removal can also minimize the propagation of surface waves. Compared to the conventional antenna, partial substrate removal may enhance the gain due to the reduction of surface wave losses and dielectric losses and without affecting the mechanical strength of the antenna or the patch size. Partial substrate removal surrounding a rectangular patch is proposed to improve the microstrip antenna performance by surface waves suppressing [7]. This technique may be referred as open air cavity as the removed substrate may be a large part.

G. Antenna Array

The most popular technique to obtain high gain of the antenna is to use multiple elements as an array that is excited through a feeding network. However, antenna arrays usually require large size and the design of the feeding network is complex to obtain the desired phase response to reduce the unstable radiation performance and signal loss. Generally, the radiation pattern of a single microstrip antenna element is wide and provides low gain. Antennas with directive radiation are preferred for many applications to provide long distance communication. This can be accomplished by utilizing an array of radiating elements configured in different geometrical structures. Usually, the elements of the array are identical to provide simpler, convenient, and more practical design [21]. The total radiated field of the array can be determined by the vector addition of the radiated field via the individual elements assuming that the current in each element is equivalent to that of the isolated element i.e. neglect coupling. This usually depends on the separation between the elements. To achieve directive patterns, the fields of elements have to add (interfere constructively) in the desired directions and cancel each other (interfere destructively) in other directions. The overall performance of antenna array depends mainly on many factors which are the configuration of the array such as linear, rectangular, circular, etc., the relative pattern of the radiating elements, the excitation amplitude and phase of elements, and the spacing between elements.

III. CONCLUSIONS

Microstrip patch antennas have many advantages; however narrow bandwidth and low gain and efficiency are their main drawbacks. Hence, numerous techniques have been investigated to enhance these drawbacks. In this paper, most of these techniques are briefly reviewed and discussed. It is observed from this survey that there is a particular relationship among gain, bandwidth and size of the microstrip antenna. It is recognized that if there is enhancement in one property, it is frequently accompanied by degradation of other property. For instance, if the antenna size decreased then it is usually at the expense of the gain and bandwidth. The three parameters can be simultaneously balanced by the utilization of variety of microstrip antenna topologies and composite enhancement techniques. Popular feeding methods of microstrip antenna are also summarized in this manuscript. It is observed that contacting methods such as microstrip and coaxial feed are easy and implement. However, non-contacting techniques like aperture coupled feed and proximity coupled feed can achieve wider bandwidth and higher gain but they are difficult to implement due to the alignment of multi-substrates.

IV. REFERENCES

- [1] C. A. Balanis, 2009, "Antenna theory analysis and design", 2nd edition, John Wiley and Sons.
- [2] M. N. Aktar, M. S. Uddin, M. R Amin, and M. M. Ali, Feb. 2011, "Enhanced Gain and Bandwidth of Patch Antenna Using EBG Substrates," International Journal Of Wireless & Mobile Networks (IJWMN), Vol. 3, No. 1.
- [3] Gonzola, D. Maagt, and sorola, Nov.1999, "Enhanced patch-antenna performance by suppressing surface waves using photonic-bandgap substrates," IEEE Trans. Microwave Theory Techn., Vol. 47, pp. 2131-2138.
- [4] [4] A. Rivera-Albino and C.A. Balanis, April 2013, "Gain Enhancement in Microstrip Patch Antennas Using Hybrid Substrates," IEEE Antennas and Wireless Propagation Letters, vol. 12, pp. 476-479.
- [5] [5] H. Attia and L. Yousefi, August 2011, "High-Gain Patch Antennas Loaded with High Characteristic Impedance Superstrates," IEEE Antennas and Wireless Propagation Letters, vol. 10, pp.858-861.
- [6] [6] Z. N. Chen, Oct. 2000, "Broadband probe-fed plate antenna," in Proc. 30th Eur. Microwave Conf., pp. 1-5.
- [7] S. B. Yeap, and Z. N. Chen, September 2010, "Microstrip patch antennas with enhanced gain by partial substrate removal," IEEE Transactions on Antennas and Propagation, vol. 58, no. 9.
- [8] S. Kumar Sharma and M. Rattan, April 2010, "Analysis of Broad Banding and Minimization Techniques for Square Patch Antenna" IETE journal of research, vol. 56, no. 2.
- [9] D. Chen, and C. H. Cheng, 2009, "A novel compact ultra-wideband (UWB) wide slot antenna with via holes"



- Progress In Electromagnetics Research, vol. 94, pp. 343-349.
- [10] S. S. Yang, A. A. Kishk, and K. Lee, 2008, "Frequency Reconfigurable U-slot Microstrip Antenna" IEEE antenna and wireless propagation letters vol. no. 7.
- [11] F. Yang, X. Zhang, X. Ye, Y. R. Samii, July 2001, "Wide band E-shaped patch antennas for wireless communications" IEEE transactions on antennas and propagation, vol. 49, no. 7.
- [12] A. Singh, A. Arya & S. Sharma, 2011, "High Gain of C Shape Slotted Microstrip Patch Antenna for Wireless System," International Journal of Applied Engineering Research, vol.7, no.11.
- [13] M. R. Ahsan, M. T. Islam, M. H. Ullah, M. J. Singh, M. T. Ali, May 2015, "Metasurface Reflector (MSR) Loading for High Performance Small Microstrip Antenna Design," PLOS ONE, vol 10, no 5, pp 1-20.
- [14] S. Wi, Y. Lee, and J. Yook, April 2007, "Wideband Microstrip Patch Antenna With U-Shaped Parasitic Elements" IEEE transactions on antennas and propagation, vol. 55, no. 4.
- [15] C. K. Wu and K. L. Wong, Sept. 5, 1999, "Broadband microstrip antenna with directly coupled and gap-coupled parasitic patches", Microwave Opt. Technol. Lett. 22, 348-349.
- [16] J. Anguera, G. Font, C. Puente, C. Borja, and J. Soler, March 2003, "Multifrequency microstrip patch antenna using multiple stacked elements," IEEE Microwave and Wireless Components Lett., vol. 13, no. 3, pp. 123-124.
- [17] S. I. Sheikh, W. Abu-Al-Saud, and A. B. Numan, Nov. 2013, "Directive Stacked Patch Antenna for UWB Applications" International Journal of Antennas and Propagation Volume 2013, pp. 1-6.
<http://dx.doi.org/10.1155/2013/389571>
- [18] Y. H. Cho., C. Pyo and J. Choi, 2013, "Gain Enhancement of Microstrip Patch Antenna Using Parasitic Metallic Bar," IEEE AP-S, vol. I, pp. 728 -731.
- [19] A. H. Abdelgwad, T. M. Said, A. M. Gody, Feb. 2015, "Developing of A Ground Penetrating Radar Antenna for Detecting Water Pollution in Underground Pipelines," International Journal of Microwaves Applications, Vol.4, No.1 pp. 1-5.
- [20] F. Y. Zulkifli, E. T. Rahardjo, and D. Hartanto, 2008, "Radiation properties enhancement of triangular patch microstrip antenna array using hexagonal defected ground structure," Progress In Electromagnetics Research M, vol. 5, pp. 101-109.
- [21] D. N. Elsheakh, M. F. Iskander, E. A. Abdallah, H. A. Elsadek, H. Elhenawy, 2010, "Microstrip Array Antenna with new 2D-Electromagnetic band gap shapes to reduce harmonics and mutual coupling," Progress In Electromagnetics Research C, vol. 12, pp. 203-213.