



IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY



VOLUME : 7 ISSUE : 11 Print / Issue Publication Date: 14-May-2023



ISSN : 2455-2143



DOI : 10.33564/IJEAST.2023.v07i11.022

Indexed In



WWW.IJEAST.COM

editor@ijeast.com



FINDING RELATED FORUM POSTS THROUGH TWITTER DATA USING MATCHING ALGORITHM

Dr.K.N.S.Lakshmi, B.Madhu Sowmya
Department of CSE
SVPEC, Visakhapatnam, A.P, India

Abstract— Forum posts has the specific problem of finding related posts to a post at hand. By considering across the related documents the contents of posts are generally consider are whole. Here similarity process are done between two posts with respective segments and should be of same intention. All posts are generally fragmented in the form of group to attain the goal bunches. Now similarities are generally cross view the forums with sections and that will be of same intention.

Keywords— Segmentation

I. INTRODUCTION

Forums are generally a online discussion site, where people hold there conversations by posts. It is like a message board and different from chat rooms. A traditional approach for finding related document that perform content comparisons across content of posts, the contents are compared by different posts. The relatedness of two posts can then be based on a comparison across segments that serve the same goal. Every posts are generally considered as segments. Segments are generally said as parts (or) sections. In This the relatedness between two posts should be based on similarities respective to segments. The segmentation methods play important role by developing work with monitoring the no of text features ,it identify by parts of post. While this process performing significant jumps are occurred because of that segmentation are occur. Now segmentation of all posts are generally clustered in the form of intention cluster so that the similarities are calculated across segmentation with same intention. plays important role.

1) DATA MINING:

. Data mining also called as knowledge Discovery refer to extracting interesting patterns and useful knowledge from huge amount of data. Data mining in the databases is a new interdisciplinary field, merging ideas from statistics, machine learning, databases and parallel computing. Knowledge Discovery in Database(KDD) is a process of finding useful information and patterns in data where as Data mining is the use of algorithms to extract the information and patterns derived by the KDD process.

CLUSTERING:

Clustering in data mining is a discovery process that groups a set of data. The principle of clustering is “Maximizing the Intra cluster similarity and minimizing the Inter cluster similarity.” That is, a cluster is a collection of data objects that are similar to one another within the same cluster and are dissimilar to the objects in the other clusters. A cluster of data can be treated collectively as one group in many applications.

SEGMENTATION

Segmentation is a key data mining technique. The key to segmentation is to decide how to split the database up. Segment is a group of consumers that react in a similar way to a particular marketing approach. So the key to segmentation is to decide how to split the database up.

II. EXISTING SYSTEM

There is no goal base division in Existing System. Question Answering Communities (QAC) plays important role they coordinate the work for posts. Division techniques are isolated into 2 general gatherings. The first is topical division where contiguous sets of content pieces are thought about for general likeness in light of terms or points. The second gathering of division strategies comprises of Transcribed oral-talk procedures utilized as a part of the investigation of translated oral correspondence utilizing semantic criteria.

1.3.1. Advantages of Existing System

- No complexity in computations.

1.3.2. Disadvantages of Existing System

- Less Efficiency. .Complexity of TF/IDF algorithm is high.
- Difficult to finding related forum posts
- Segmentation increases cost
- Searching is difficult
- Complexity of TF/IDF algorithm is high



III. PROPOSED SYSTEM:

3.1.SEGMENTATION OF POSTS

The challenging task is finding right segmentation process, from segmented documents, that are occurred in large body of work, if it is in the form of document d , there are $2^{j_{d1}}$ possible segmentations are occur.

Every segmentation process should be in the form of

- coherent
- largely disconnected from its adjacent segments.

Segmentation is the intention-based, these two properties translate to a segmentation where every segment conveys a single clear intention conveys by the adjacent segments.

3.2. SEGMENT GROUPING

Segments with similar intentions are created same group and segments with different intentions in different groups. It is modeled with vector of features, array of information are taken here. Now each cluster are generally communicates respectively the same goal. I to denote a cluster, and C to denote the set of the generated clusters.

Vector of weights that are based on the feature values are created by us. Vector with the letter F . Now consider two types of weights that capture the strength of the use of each CM categorical value, of each feature.

Now each CM value with in the segment are measured then the comparisons are done to categorical values that belong to same communication appearing in segments. Using the notion of the distribution table DSb_{CMr} of a communication mean CMr introduced in Section we define the vector F_s of weights, one weight for each feature.

3.3.SEGMENTATION REFINEMENT:

They should have same document with same segments that are end up with same cluster with same intention., if they have the same intention but are not same cluster then consequence document. The segments that belong to the same document in a cluster are concatenated into one.

Advantages of Proposed System

- Complexity is low.
- Searching became easy.
- Finding related forum posts became more efficiency.
- Searching became now easy

IV. ALGORITHM:

3.4.1.Matchin Algorithm:

Document matching is one of the best technique plays important role by collecting of documents that are generally related to reference document d_q . Now the d_q reference document are measure the relatedness between other documents d_0 are lie in the form of IR technique.

3.4.1.1. Matching with respect to a specific Intention:

Every document with some specific intention are projected on each cluster. The specific intention are made by measuring the related documents to reference document d_0 . Text comparison are computed the relatedness between the documents like IR technique i.e. TF/IDF model. TF/IDF method and its probabilistic variance BM25 consists of a term weighting scheme that weighs a term in a document considering the number searching That variance computes the weight of a term in a document d^0 . If s_q and s^0 are the segments of the documents d_q and d^0 , respectively, in the intention cluster. where $fsq(t)$ denotes the frequency of the term t in the segment s_q , jI_j the cardinality of the intention cluster, and jI_j' the number of segments in the intention cluster.

3.4.1.2. Matching with respect to All the Intentions:.


This algorithm consist of top-nlists generated across the different intentions, ., the set M are used to generate the k most related documents to the reference document d_q . R is created as new list contains in every document in lists in M . Each document are associated with the sum of the scores with which this document appears in the various lists in M . The k elements in R with the highest score are returned as answer to the request of the matching documents to the reference document d_q . High value for n compared to the value of k , on the other hand, will favor documents that appear in many lists even with not very high scores. We have empirically found that a good choice is an n equal to $2k$

3.4.2. Clustering Algorithm

Clustering is the task of dividing the data points into a number of groups such that data points in the same groups are more similar to other data points in the same group than those in other groups. In simple words, the aim is to segregate groups with similar traits and assign them into clusters. It is the most important unsupervised learning problem

K-Mean Method

If a vector of documents ($D_1, D_2, \dots, D_n$) is given, K-means clustering Algorithm will partition the n documents into K clusters ($K \leq n$) such that cosine distance between them is minimum.

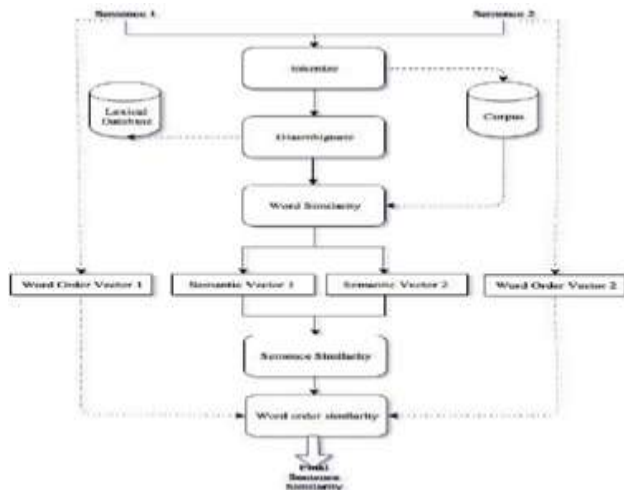

3.4.3. 1 TF/IDF Algorithm

It is generally said as term frequency-inverse document frequency. It is often used as a weighting factor in searches of information retrieval, text mining, and user modeling. TF-IDF, a vector space based representation is the common technique used for text processing.

TF-IDF weighting scheme are often used for in scoring and ranking a document's relevance given a user query. TF-IDF can be successfully used for stop-words filtering in various subject fields, including

- Text Summarization
- Classification

The TF-IDF IS calculated as:

TF-> Term Frequency

IDF->Inverse Document Frequency

$$tfidf(t, d, D) = tf(t, d) \cdot idf(t, D)$$

where

t=term


d=referencing document

D=set of Documents

1. Randomly select initial centroid that divides the documents into k clusters.
2. Compute Cosine distance of each document from the centroid of each of the clusters. Assign that document to the cluster with the closest centroid.
3. Repeat step 2 until there is no change in newly formed clusters.

$$CS_{ij} = \begin{pmatrix} 1 & D(1,2) & D(1,3) & D(1,4) & \dots & D(1,n) \\ D(2,1) & 1 & D(2,3) & D(2,4) & \dots & D(2,n) \\ D(3,1) & D(3,2) & 1 & D(3,4) & \dots & D(3,n) \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots \\ D(n,1) & D(n,2) & D(n,3) & D(n,4) & \dots & D(n,n) \end{pmatrix}$$

3.4.3. The Proposed Method As Follows:

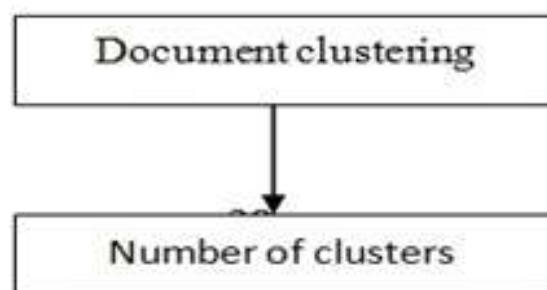

V. OUTPUT



Cluster 1	Cluster 2	Cluster 3	Cluster 4	Cluster 5
Page11.htm				Page11.htm
Page42.htm				Page1.htm
Page43.htm				Page10.htm
Page45.htm				Page11.htm
Page47.htm				Page12.htm
Page4.htm				Page13.htm
Page11.html				Page14.htm
Page12.html				Page15.htm
Page13.html				Page16.htm
Page17.htm				Page17.htm
Page18.htm				Page18.htm
Page19.htm				Page19.htm
Page20.htm				Page20.htm
Page21.htm				Page21.htm
Page22.htm				Page22.htm
Page23.htm				Page23.htm
Page24.htm				Page24.htm
Page25.htm				Page25.htm
Page26.htm				Page26.htm
Page27.htm				Page27.htm
Page28.htm				Page28.htm
Page29.htm				Page29.htm
Page30.htm				Page30.htm
Page31.htm				Page31.htm
Page32.htm				Page32.htm
Page33.htm				Page33.htm
Page34.htm				Page34.htm
Page35.htm				Page35.htm
Page36.htm				Page36.htm
Page37.htm				Page37.htm
Page38.htm				Page38.htm
Page39.htm				Page39.htm
Page40.htm				Page40.htm
Page41.htm				Page41.htm
Page44.htm				Page44.htm
Page46.htm				Page46.htm
Page48.htm				Page48.htm
Page50.htm				Page50.htm
Page51.htm				Page51.htm
Page52.htm				Page52.htm
Page53.htm				Page53.htm
Page54.htm				Page54.htm
Page55.htm				Page55.htm
Page56.htm				Page56.htm
Page57.htm				Page57.htm
Page58.htm				Page58.htm
Page59.htm				Page59.htm
Page60.htm				Page60.htm
Page61.htm				Page61.htm
Page62.htm				Page62.htm
Page63.htm				Page63.htm
Page64.htm				Page64.htm
Page65.htm				Page65.htm
Page66.htm				Page66.htm
Page67.htm				Page67.htm
Page68.htm				Page68.htm
Page69.htm				Page69.htm
Page70.htm				Page70.htm
Page71.htm				Page71.htm
Page72.htm				Page72.htm
Page73.htm				Page73.htm
Page74.htm				Page74.htm
Page75.htm				Page75.htm
Page76.htm				Page76.htm
Page77.htm				Page77.htm
Page78.htm				Page78.htm
Page79.htm				Page79.htm
Page80.htm				Page80.htm
Page81.htm				Page81.htm
Page82.htm				Page82.htm
Page83.htm				Page83.htm
Page84.htm				Page84.htm
Page85.htm				Page85.htm
Page86.htm				Page86.htm
Page87.htm				Page87.htm
Page88.htm				Page88.htm
Page89.htm				Page89.htm
Page90.htm				Page90.htm
Page91.htm				Page91.htm
Page92.htm				Page92.htm
Page93.htm				Page93.htm
Page94.htm				Page94.htm
Page95.htm				Page95.htm
Page96.htm				Page96.htm
Page97.htm				Page97.htm
Page98.htm				Page98.htm
Page99.htm				Page99.htm
Page100.htm				Page100.htm

VI. CONCLUSION

This paper presents an approach to calculate the semantic similarity between two words, sentences or paragraphs. A novel approach proposed by us for matching a reference post to the k most related posts in a collection. In our method, segmentation are done across the posts that convey similar with some intentions. We presented several experiments regarding the right segmentation criteria, the effectiveness of the segmentation algorithms and the formation of intention clusters that prove that a rather intuitive concept, that of the author intentions to communicate a certain message, can be effectively captured by an automated process. Then extractive summarization is used to extract feature terms and the summarized sentences were ranked based on feature frequency of the posts, measuring the relatedness score after having distinguished the different

VII. FUTURE SCOPE

- As we are just transferring only the text messages, we can also transfer the files, images etc.
- As we are using MUTUAL AUTHANTICATION PROTOCOL for the communication we can also use OPTIMALITY OF KEYING PROTOCOL.
- In this project we have been used symmetric keys for the communication we can also use ID of the sensors for the communication.

REFERENCES

- [1]. M. Chen, X. Jin, and D. Shen, "Short text classification improved by learning multi-granularity topics," in IJCAI, 2011, pp. 1776–1781.
- [2]. J. Jeon, W. B. Croft, and J. H. Lee, "Finding semantically similar questions based on their answers," in Proceedings of the 28th ACM SIGIR Conference, ser. SIGIR '05. New York, NY, USA: ACM, 2005, pp. 617–618
- [3]. S. Robertson, S. Walker, and M. Hancock-Beaulieu, "Okapi at TREC-7: Automatic ad hoc, filtering, VLC and interactive track," TREC '98, pp. 199–210, 1998
- [4]. Jiawei Han, Micheline Kamber, Data Mining and Concepts.
- [5]. Maggret H. Dunham, Data Mining and Introductory to Advanced Topics
- [6]. .ClusterAnalysis:-
http://www.tutorialspoint.com/data_mining/dm_cluster_analysis.htm
- [7]. DataMining:
<http://www.webdocs.cs.ualberta.ca/~zaiane/courses/comp690>
- [8]. PorterStemmerAlgorithm:
<http://snowball.tartarus.org/porter/stemmer.htm>
- [9]. TF-IDF: <http://www.tfidf.com>
- [10]. K-Means-Algorithm:
<http://sites.google.com/site/dataclusteringalgorithms/k-means-clustering-algorithm>
- [11]. SentimentAnalysis – Lexalytics:
<https://www.lexalytics.com/technology/sentiment>
- [12]. G. Salton, A. Singhal, C. Buckley, and M. Mitra, "Automatic text decomposition using text segments and text themes," in ACM Hypertext, 1996, pp. 53–65
- [13]. S. Louvigne, N. Rubens, F. Anma, and T. Okamoto, "Utilizing social media for goal setting based on observational learning," in ICALT, 2012, pp. 736–737.
- [14]. K. Wang, Z. Ming, and T. Chua, "A syntactic tree matching approach to find similar questions in community QAservices," in ACM SIGIR, 2009, pp. 187 – 194.
- [15]. A. Shtok, G. Dror, and Y. Maarek, "Learning from the past: Answering new questions with past answers," in WWW, 2012, pp. 759–768.
- [16]. K. Jones, C. Van Rijsbergen, B. L. Research, and D. Department, Report on the Need for and Provision of an Ideal Information Retrieval Test Collection, ser. British Library Research and Development reports, 1975.



- [17]. J. Kekalainen, "Binary and graded relevance in ir," *Inf. Processing & Management*, vol. 41, no. 5, pp. 1019 – 1033, 2005.
- [18]. Z.-Y. Ming, T.-S. Chua, and G. Cong, "Exploring domain specific term weight in archived question search," in *Proceedings of the 19th ACM CIKM*, ser. CIKM '10. New York, NY, USA: ACM, 2010, pp. 1605–1608.
- [19]. H. Wen, W. Zhongyuan, W. Haixun, Z. Kai, and Z. Xiaofang, "Short text understanding through lexical-semantic analysis," in *IEEE ICDE*, 2015
- [20]. J. Jeon, W. B. Croft, and J. H. Lee, "Finding semantically similar questions based on their answers," in *Proceedings of the 28th ACM SIGIR Conference*, ser. SIGIR '05. New York, NY, USA: ACM, 2005, pp. 617–618.

IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

ABOUT IJEAST

International Journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high-quality research papers in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

FOCUS AREAS

- Engineering
- Applied Science
- Technology
- Innovation & Development
- Interdisciplinary Studies



PEER REVIEWED

All submissions are rigorously peer reviewed to ensure quality.



OPEN ACCESS

Free and unrestricted access to research for all.



GLOBAL REACH

Connecting researchers and professionals worldwide.



TIMELY PUBLICATION

We ensure a swift and efficient publication process.



For more information, visit our website

www.ijeast.com



INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

✉ editor@ijeast.com

🌐 www.ijeast.com

📍 India



2455-2143